

Open Frame LCD

USB Type-C Display


10.4" (4:3)

Specifications




Model Name	R10L100-POT2-C
Panel Size	10.4"
Active Display Area(mm)	210.4 (H) x 157.8 (V)
Resolution	1024 x 768
Brightness	350 (Typical) nits
Contrast Ratio	1200:1 (Typical)
Viewing Angle (CR>=10 L/R/U/D)	-88~88 (H) ; -88~88 (V)
Display Colors	16.2M (6 bits/color)
Standard Input Signal	USB Type-C connector
Touch Screen	Projected Capacitive Multi-touch (Default) or Protection Glass (non-touch) (Optional)
Speakers	2 x Speaker (Optional)
OSD	5 Keys: -, +, Power, Esc, Enter
Power source	USB Type-C Alt mode (5V/3A)
Power Consumption	10W typical, Normal operation
Operating Temperature	0~50°C
Storage Temperature	-10~60°C
Accessories	1 x USB Type-C cable
Certifications	CE, FCC

*Outside dimension and I/O will be different from standard.



1. USB Type-C Connector
2. OSD Button

Mechanical Drawing

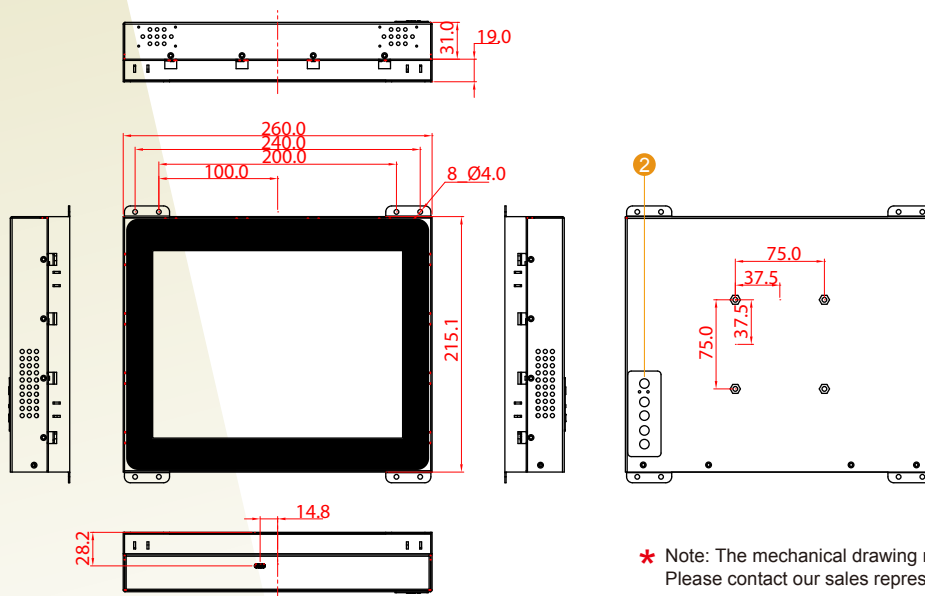

UNIT:mm

* Note: The mechanical drawing may change when adding touch screen.
Please contact our sales representative if you need further product information.