

Open Frame LCD


USB Type-C Display

7" (16:10)

Specifications

RoHS
COMPLIANT
2011/65/EU


Model Name	W07L100-POT1-C
Panel Size	7"
Active Display Area (mm)	153.6 (H) x 90 (V)
Resolution	1024 x 600
Brightness	320 (Typical) nits
Contrast Ratio	500:1 (Typical)
Viewing Angle (CR>=10 L/R/U/D)	-75~75 (H) ; -75~70 (V)
Display Colors	16.7M(8 bits/color)
Standard Input Signal	USB Type-C Connector
Touch Screen	Projected Capacitive Multi-touch (Default) or Protection Glass (non-touch) (Optional)
Speakers	2 x Speaker (Optional)
OSD	5 Keys: -, +, Power, Esc, Enter
Power Source	USB Type-C Alt mode (5V/3A)
Power Consumption	6W typical, Normal operation
Operating Temperature	0~50°C
Storage Temperature	-10~60°C
Accessories	1 x USB Type-C cable
Certifications	CE, FCC



1. USB Type-C Connector
2. OSD Button

*Outside dimension and I/O will be different from standard.

Mechanical Drawing

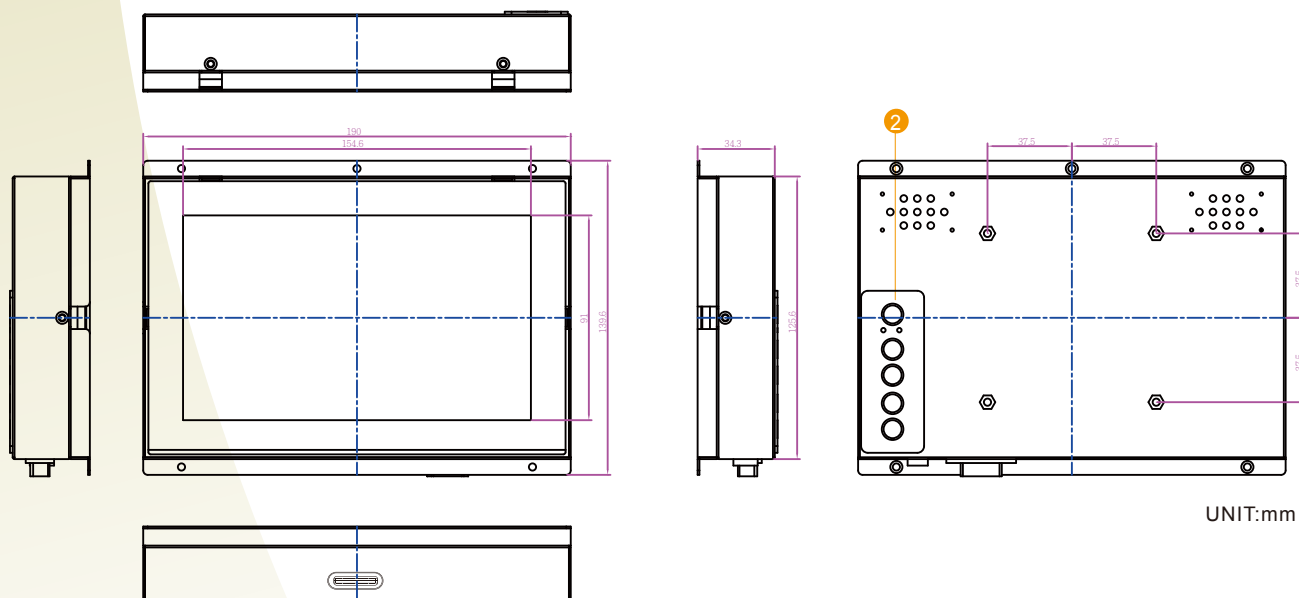

UNIT:mm

* Note: The mechanical drawing may change when adding touch screen.
Please contact our sales representative if you need further product information.