

## Key Features

- 4000 lumens and a 22000:1 contrast ratio
- Long lasting lamp life of up to 15000hrs
- Dual HDMI input and MHL support
- LAN control support - Crestron, AMX and PJ Link
- Auto power on




## Product Description

The ViewSonic PG703X is a high brightness XGA projector with 4000 ANSI lumens and a 22,000:1 contrast ratio that projects the finest detail regardless of the amount of ambient light in any medium sized space, such as a meeting room or classroom. The PG703X comes with an energy-saving SuperEco mode that reduces power consumption and extends lamp life to 15,000 hours, reducing the frequency of lamp replacement and lowering maintenance costs. In addition to dual HDMI inputs (MHL), S-Video, and VGA out, the PG703X includes RS232 and LAN connectivity, and is certified by Crestron, AMX and PJ Link networkable solutions, making it easy to control and monitor remotely.



1. Keypad
2. LED indicator
3. Lamp cover
4. Security Lock
5. Zoom/Focus
6. Front IR
7. Projection Lens

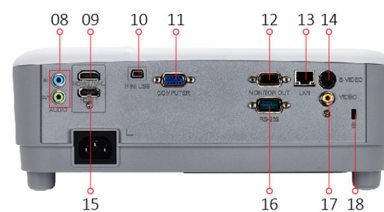

8. Audio in/out
9. HDMI/ MHL
10. Mini USB for Service
11. VGA
12. VGA out
13. LAN
14. S-Video

15. HDMI
16. RS232
17. Video
18. Kensington® Lock Slot

## SPECIFICATION

Projection system:	0.55" XGA
Native Resolution:	1024x768
DC type:	DC3
Brightness:	4000lm
Contrast Ratio with SuperEco mode:	22000:1
Display Colour:	1.07 Billion Colours
Light Source:	Lamp
Light source life (Nor/SuperEco):	4000/15000
Lamp Watt:	240W
Lens:	F=2.56-2.68, f=22-24.1 mm
Projection Offset:	120%+/-5%
Throw Ratio:	1.96-2.15
Image size:	30" - 300"
Throw Distance:	1.19m-13.11m(100" @3.98m)
Keystone:	±40° (Vertical)
Optical Zoom:	1.1x
Audible Noise (Eco):	27dB
Resolution Support:	VGA(640 x 480) to FullHD(1920 x 1080)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1083p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K~102KHz
Vertical Scan Rate:	23~120Hz

## INPUT

Computer in (share with component):	1
Composite:	1
S-video:	1
Audio-in (3.5mm):	1
HDMI:	1 (Back)
HDMI/MHL:	1 (Back)

## OUTPUT

Monitor out:	1
Audio out (3.5mm):	1
Speaker:	10W

## CONTROL

RS232:	1
RJ45:	1
USB type mini B (Services):	1

## OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz AC
Power Consumption:	Normal: 350W Standby: <0.5W
Operating Temperature:	0~40°C
Carton:	Brown
Net Weight:	2.4kg
Dimensions (WxDxH) w/adjustment foot:	294x218x110mm
Language:	English, France, Spanish, Thai, Korea, Germany, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnam

## STANDARD ACCESSORY

Power Cord:	1
VGA cable:	1
Remote Control:	1 (w/Laser pointer)
QSG & CD:	1

## OPTIONAL ACCESSORY

Warranty Card:	Yes (CN Only)
Air Filter:	RSPL