

43" Embedded PC Kiosk (no touch)



- Allwinner® V40 Cortex™ A7 QuadCore 1GHz Processor
- 1 GB DDR3 RAM & 8 GB EMMC FLASH
- Supports Android up to version 6.X
- Integrated bluetooth 4.0
- Full HD Resolution – 1920 × 1080
- Comprehensive IP65 protection
- 1000+ cd/m² brightness for increased visibility
- 2 year guarantee

The Embedded Touch-PC series is faytech's cost-effective, yet powerful solution for a wide range of customer requirements. All devices of the series are equipped with the powerful Allwinner V40 QuadCore processor, a Mali400MP2 graphics chipset and various connectors. The devices come with built in W-LAN, Bluetooth 4.0 and a USB OTG port.

Each embedded system comes standard with 1 GB DDR3 RAM and 8 GB flash memory and includes an SD card slot for further hard disk expansion. The systems can be upgraded to 3G + GPS over MiniPCle using the available SIM card slot.


faytech's new Embedded Series is our most cost-effective solution for retail and digital signage solutions.



HIGH
BRIGHTNESS



HDMI



Product name	43" Embedded PC Kiosk (no touch)
Model number / EAN number	FT43V40HBK02

IP Rating	
IP65	

LCD Panel	
Screen diagonal (Inch/cm)	43/109.22
Display active screen size (cm)	94.09×52.93
Aspect ratio	16:9
Physical resolution	1920×1080
External maximum showable resolution - HDMI	1920×1200
Colours displayed	16.7M
Brightness (cd/m ²)	1000+
Contrast	3000:1
Typical reaction time Tr/ Tf (ms)	8/8
Visual Angle horizontal/vertical (°)	178/178
Backlight / Backlight Lifetime (hours)	LED / 50,000

Operation / Mechanical	
Operating Temperature (°C)	-10 ~ +60
Humidity Range (RH)	10% - 90%
Net weight (kg)	60.00
Gross weight (kg)	85.00 (incl. cartonnage)
Housing material	Metal
Housing (cm) L × W × H	143.50 × 62.40 × 3.40
Mounting	Aluminum stand


Internal Connectors	
1x SD-card	
1x SIM-card	
3x Serial	
4x USB 2.0	
1x USB OTG	
12x GPIO	
1x Line-In	
1x Line-Out	
18/24Bit LVDS	
1x Amplifier for 2x 6W loudspeaker	
1x SATA-Port	
1x RTC	
1x CAN bus	

PC System	
CPU	Allwinner® V40 QuadCore
Chipset	Cortex A7
Graphic GPU	ARM® Mali400 Mp2 Complies with OpenGL ES 2.0/1.1
Audio	Integrated HI-FI 100dB Audio Codec Dual analog mic. 2x6W amplifier
Memory	1x 1GB DDR3
Storage	8GB EMMC Flash
Network	10/100Mbps Network; W-LAN
OS	Android 6.0
Wireless Connection	Bluetooth 4.0

Power	
Power Supply	100-240V ACDC active switching; 24V DC Out
Working Power (V)	24
Power Consumption (W)	70
Stand-By Consumption (W)	<1

External Connectors	
1x 24V DC-In	
2x USB 2.0	
1x HDMI	
1x OTG	
1x GPIO	
1x SIM card Slot	
1x SD card Slot	
1x 10/100Mbit RJ45 Connector	
1x Mic-In	
1x Ear-out	

Included in the Delivery	
Power Supply (see Power section)	
Short Installation Manual	
Aluminum Stand	

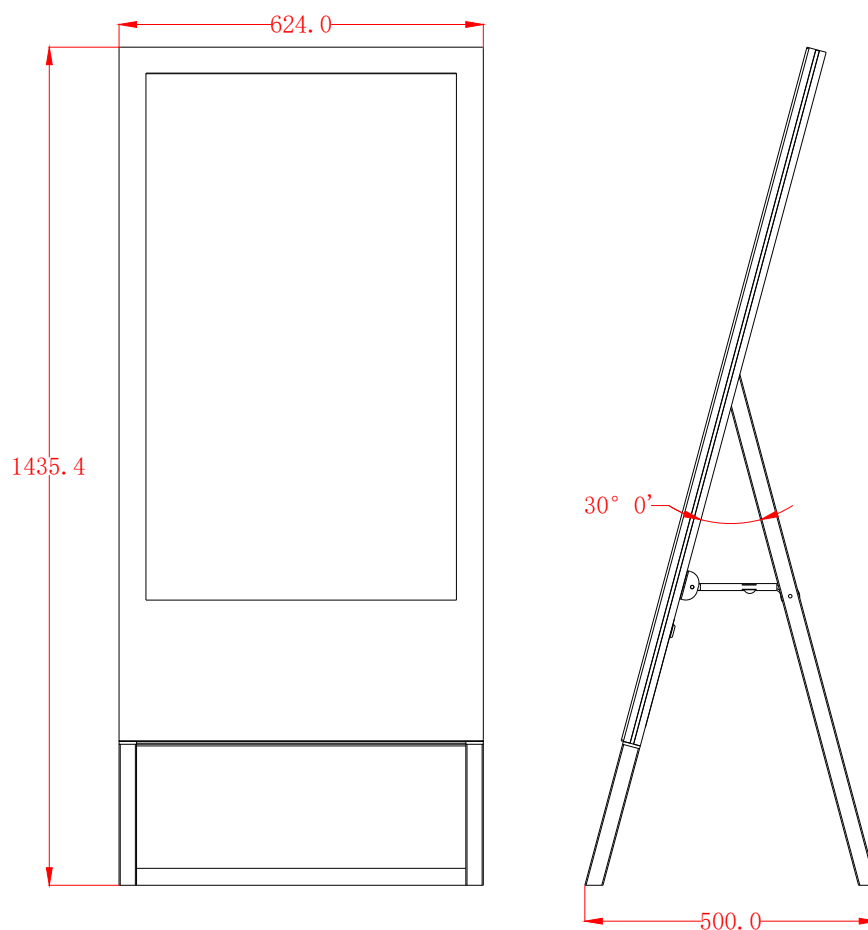

Corporate Headquarters

faytech Tech. Co., Ltd.
Building F., Hongmen Tech. Zone,
Jihua Rd., Shenzhen, China 518129

support@faytech.com
contact@faytech.com
www.faytech.com

China: +86 755 89580612
Germany: +49 551 82098660
USA: +1 646 205 3214