


Key Features

- Wireless presentation across devices and rooms
- Easy cast function pairing with USB-C/HDMI dongle
- USB flash drive plug-and-play for photos, music & video
- Multitasking with powerful embedded player & OPS PC slot
- 4K slim bezel commercial display



Product Description

The ViewSonic® CDE8620 is an 86" 4K wireless presentation display. The built-in screen sharing software*, ViewBoard® Cast and Display, as well as ViewBoard® Cast USB-C/HDMI dongles enable multiple users, whether on-site or on-line, to participate in conferences and share content with each other simultaneously, transforming the CDE8620 into a dynamic content hub. This reliable commercial display is equipped with a quad-core processor and internal memory, allowing constant multimedia play from internal storage or a USB flash drive. Supporting remote configuration and content management systems, the ViewSonic® CDE8620 is also suitable for diverse signage applications. *Chrome, Android, Windows, Mac OS, and iOS compliant

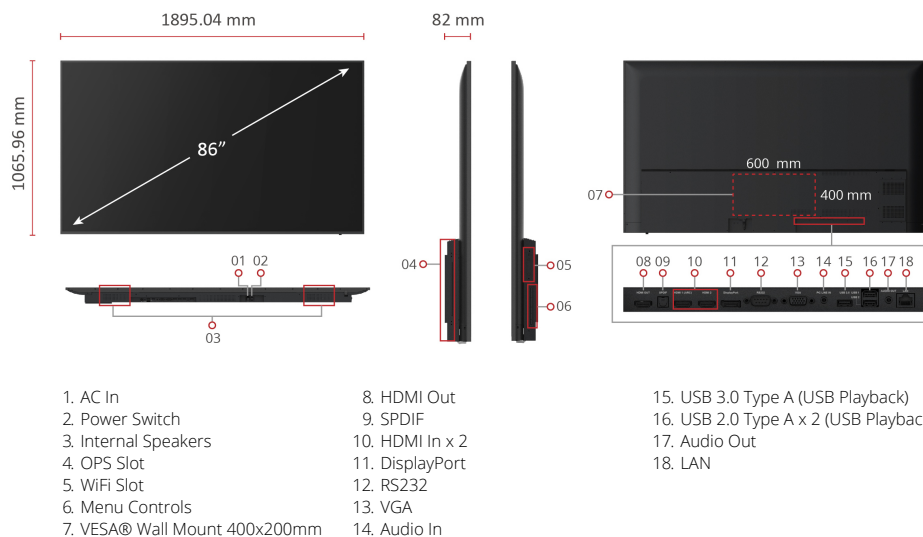

Visit Us  www.viewsonic.com

DISPLAY

Panel Size:	86"
Type/ Tech:	TFT LCD Module. IPS type, DLED backlight
Display Area (mm):	1895.040 (H) × 1065.960 (V) (86" diagonal)
Native Resolution:	3840 x 2160
Aspect Ratio:	16:9
Colors:	1.07G colors
Brightness:	450 nits (typ.)
Contrast Ratio:	1200:1 Typ.
Response Time:	8 ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	30,000 Hours (min)
Surface Treatment:	Anti-glare, 2H hardness, Haze 28%
Bezel:	Slim
Orientation:	Landscape

TOUCH

INPUT

HDMI:	x2
RGB / VGA:	x1
DisplayPort:	x1
Audio:	x1 (3.5mm)
RS-232:	x1
OPS:	x1 (OPS slot)
WiFi:	x1 (Optional WiFi module)

OUTPUT

HDMI:	x1
Audio:	x1 (3.5mm)
SPDIF:	x1 (Fiber)

LAN

RJ45:	x1
-------	----

USB

Type A:	2.0 Type A : x 2 (USB Playback), 3.0 Type A : x 1 (USB Playback)
---------	--

MICRO SD CARD SLOT

SPEAKERS

SPEAKERS:	Max. 16Wx2
-----------	------------

COMPATIBILITY

RGB PC/HDMI PC:	Up to 1920x1080@60Hz. Refer to timing table
HDMI:	480i, 480p, 720p, 1080i, 1080p, 4K2K@60Hz
DisplayPort:	480i, 480p, 720p, 1080i, 1080p, 4K2K@60Hz
Android Version:	Android 8.0

POWER

Voltage:	100V-240V, 50/60Hz (AC)
Consumption:	Normal 365 W, Max 450 W

ERGONOMICS

Wall Mount (VESA®):	600x400 mm
---------------------	------------

OPERATING CONDITIONS

Temperature (° C):	0 to 40°C
Humidity:	20% ~ 80% non-condensing

DIMENSIONS (W X H X D)

Physical (inch / mm):	76.02 x 43.67 x 3.24 in / 1931.0 x 1109.0 x 82 mm
Packaging (inch / mm):	83.39 x 50.05 x 11.02 in / 2118 x 1271 x 280 mm

WEIGHT

Net (lb / kg):	50.4 kg / 111.11 lbs (w/o stand)
Gross (lb / kg):	69.8 kg / 153.88 lbs

REGULATIONS

REGULATIONS:	cULus, FCC, Energy Star, EPEAT, MX-CoC, Mexico Energy, CE, CB, RoHS, ErP, REACH, WEEE, Custom Union, UkrSEPRO, RCM, MEPS
--------------	--

PACKAGE CONTENTS

PACKAGE CONTENTS:	1. CDE8620 commercial display, 2. Remote control with batteries, 3. Quick start guide, 4. Power cables (1.5mm), 5. HDMI cable, 6. Wall mount screw, 7. RS232 adapter"
-------------------	---