


Key Features

- Wireless presentation across devices and rooms
- Easy cast function paring with USB-C/HDMI dongle
- USB flash drive plug-and-play for photos, music & video
- Multitasking with powerful embedded player & OPS PC slot
- 4K slim bezel commercial display



Product Description

The ViewSonic® CDE7520 is a 75" 4K wireless presentation display. The built-in screen sharing software*, ViewBoard® Cast and Display, as well as ViewBoard® Cast USB-C/HDMI dongles enable multiple users, whether on-site or on-line, to participate in conferences and share content with each other simultaneously, transforming the CDE7520 into a dynamic content hub. This reliable commercial display is equipped with a quad-core processor and internal memory, allowing constant multimedia play from internal storage or a USB flash drive. Supporting remote configuration and content management systems, the ViewSonic® CDE7520 is also suitable for diverse signage applications. *Chrome, Android, Windows, Mac OS, and iOS compliant

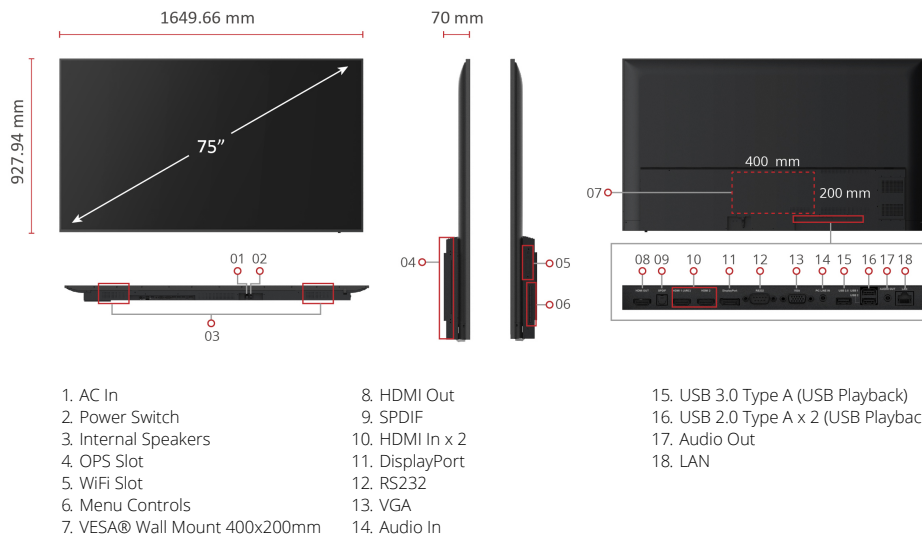

Visit Us  www.viewsonic.com

DISPLAY

| | |
|--------------------|--|
| Panel Size: | 75" |
| Type/ Tech: | TFT LCD Module. IPS type, DLED backlight |
| Display Area (mm): | 1649.664(H) × 927.936(V) (75" diagonal) |
| Native Resolution: | 3840 x 2160 |
| Aspect Ratio: | 16:9 |
| Colors: | 1.07G colors |
| Brightness: | 450 nits (typ.) |
| Contrast Ratio: | 1200:1 Typ. |
| Response Time: | 8 ms |
| Viewing Angles: | H = 178, V = 178 typ. |
| Backlight Life: | 30,000 Hours (min) |
| Surface Treatment: | Anti-glare, 3H hardness, Haze 25% |
| Bezel: | Slim |
| Orientation: | Landscape |

TOUCH

INPUT

| | |
|--------------|---------------------------|
| HDMI: | x2 |
| RGB / VGA: | x1 |
| DisplayPort: | x1 |
| Audio: | x1 (3.5mm) |
| RS-232: | x1 |
| OPS: | x1 (OPS slot) |
| WiFi: | x1 (Optional WiFi module) |

OUTPUT

| | |
|--------|------------|
| HDMI: | x1 |
| Audio: | x1 (3.5mm) |
| SPDIF: | x1 (Fiber) |

LAN

| | |
|-------|----|
| RJ45: | x1 |
|-------|----|

USB

| | |
|---------|--|
| Type A: | 2.0 Type A : x 2 (USB Playback), 3.0 Type A : x 1 (USB Playback) |
|---------|--|

MICRO SD CARD SLOT

SPEAKERS

| | |
|-----------|------------|
| SPEAKERS: | Max. 16Wx2 |
|-----------|------------|

COMPATIBILITY

| | |
|------------------|---|
| RGB PC/HDMI PC: | Up to 1920x1080@60Hz. Refer to timing table |
| HDMI: | 480i, 480p, 720p, 1080i, 1080p, 4K2K@60Hz |
| DisplayPort: | 480i, 480p, 720p, 1080i, 1080p, 4K2K@60Hz |
| Android Version: | Android 8.0 |

POWER

| | |
|--------------|-------------------------|
| Voltage: | 100V-240V, 50/60Hz (AC) |
| Consumption: | Normal 240 W, Max 300 W |

ERGONOMICS

| | |
|---------------------|------------|
| Wall Mount (VESA®): | 400x200 mm |
|---------------------|------------|

OPERATING CONDITIONS

| | |
|--------------------|--------------------------|
| Temperature (° C): | 0 to 40°C |
| Humidity: | 20% ~ 80% non-condensing |

DIMENSIONS (W X H X D)

| | |
|------------------------|---|
| Physical (inch / mm): | 65.83 x 37.59 x 2.76 in/ 1672.0 x 955.0 x 70.0 mm |
| Packaging (inch / mm): | 71.97 x 43.23 x 8.66 in/1828 x 1098 x 220 mm |

WEIGHT

| | |
|------------------|----------------------------------|
| Net (lb / kg): | 29.30 kg / 64.60 lbs (w/o stand) |
| Gross (lb / kg): | 41.7 kg/91.93 lbs |

REGULATIONS

| | |
|--------------|--|
| REGULATIONS: | cULus, FCC, Energy Star, EPEAT, MX-CoC, Mexico Energy, CE, CB, RoHS, ErP, REACH, WEEE, Custom Union, UkrSEPRO, RCM, MEPS |
|--------------|--|

PACKAGE CONTENTS

| | |
|-------------------|--|
| PACKAGE CONTENTS: | 1. CDE7520 commercial display, 2. Remote control with batteries, 3. Quick start guide, 4. Power cables (1.5mm), 5. HDMI cable, 6. Wall mount screw, 7. RS232 adapter |
|-------------------|--|