

PHILIPS

EVNIA



QD OLED gaming
monitor

Gaming Monitor

Evnia 8000

49 (48.9" / 124.3 cm diag.)

5120 x 1440 (Dual QHD)



49M2C8900L

Gaming beyond innovation

Experience luxurious gaming with this monitor's colourful QD OLED display, incredible DisplayHDR™ TrueBlack 400 certification and booming DTS Sound™ speakers. This monitor is likely to give you a gaming escapade that's hard to forget.

Features designed for gamers' needs

- Evnia Precision Centre: Maximise Your Gaming Experience
- AI-enhanced Ambiglow: for intensified entertainment
- Dynamic Lighting: Synchronise lighting on all devices.
- DTS Sound™ with 30 W output: for enhanced audio

Built for fast action

- AMD FreeSync™ Premium Pro; smooth, low latency HDR gaming
- Low input lag reduces time delay between devices to monitor
- SmartImage game mode optimised for gamers
- VESA ClearMR 8000: for trusted, high-quality image

Immersive visuals

- 32:9 SuperWide screen designed to replace multiscreen setups
- DisplayHDR™ True Black 400 delivers incredible shadow details
- True 10-bit display reproduces smoother gradients on visuals

The gaming advantage is yours

Gaming Monitor

QD OLED gaming monitor

49M2C8900L/00

Highlights

QD OLED technology



QD-OLED represents a hybrid approach that marries OLED panels and quantum dot technology. By combining what's best of both, QD-OLED guarantees high contrast, deep blacks and unlimited viewing angles, with a higher peak brightness and more vibrant colours.

Evnia Precision Centre



Evnia Precision Centre is an easy-to-use software designed to optimise and personalise your Evnia monitor. Whether you're a casual or competitive gamer, it offers a wide range of customisation options to match your unique gaming style. With intuitive controls and seamless navigation, Evnia Precision Centre gives you full control, providing everything you need to elevate your gaming to the next level — right at your fingertips.


True 10-bit colour depth



With this Philips true 10-bit colour display, you can see colour-critical professional work of exceptional colour accuracy that meets

professional standards. Compared with conventional 8-bit colour displays, this Philips monitor produces a more natural transition between hues for smoother gradients.

VESA ClearMR 8000

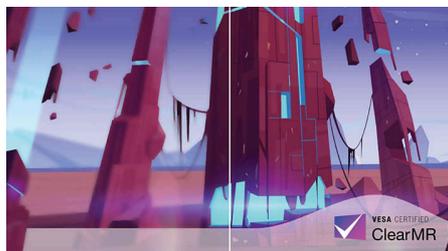

Previously, methods to test blurry image quality were measured through MRPT. VESA Certified ClearMR acts as an alternative to MRPT in which blur is tested with a digital high-speed camera. For monitors that are sent in and certified through VESA Certified ClearMR, you can rest assured that you will have an accurate assessment of the monitor's blur quality. Each certification is defined through a CMR range, with the highest tier being VESA ClearMR 8000. As this monitor is certified as ClearMR 8000, it has one of the highest classifications of image quality, meaning less overall blur.

AI-enhanced Ambiglow



Our AI-enhanced processor analyses the incoming image content and continuously adapts the colour and brightness of the emitted light to match the image. This feature adds a new dimension to your viewing experience. The innovative Ambiglow uses its AI capabilities to create a truly immersive and customisable gaming experience. From filling your gaming room with colour to feeling like you are part of

the game, the AI-enhanced Ambiglow is made to make your gaming experience the best it's ever been by combining intelligence, colour and light.

Stark ShadowBoost



This feature enhances dark scenes without overexposing lightened areas. The Stark ShadowBoost feature has three selectable levels that offer texturised images with better colour saturation and higher contrast, so you can see better in both light and dark environments. In addition, this feature helps you fine-tune your sight so that enemies get exposed more quickly when gaming.

DTS Sound™ with 30 W output



Your elevated sound experience has arrived. This monitor is equipped with four 7.5 watt speakers, ultimately adding up to a 30 W output sound system. In addition to the extra wattage, the DTS Sound speakers provide a warm, detailed and enhanced audio experience that will ultimately make your gaming experience more immersive.




Gaming Monitor

QD OLED gaming monitor

49M2C8900L/00

Highlights

SmartImage Game mode

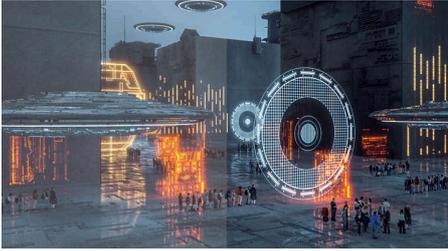

The new Philips gaming display has quick-access OSD fine-tuned for gamers, offering you multiple options. "FPS" mode (First person shooting) improves dark themes in games, allowing you to see hidden objects in dark areas. "Racing" mode adapts the display with the fastest response time and high colour, along with image adjustments. "RTS" mode (Real-time strategy) has a special SmartFrame mode that enables highlighting of specific area and allows for size and image

adjustments. Gamer 1 and Gamer 2 enable you to save personal customised settings based on different games, ensuring best performance.

Dynamic Lighting



This feature is a Microsoft certification program that enables users with Windows 11 to synchronise and manage the RGB lighting of all of their monitors and peripherals from one menu. By doing this, the Dynamic Lighting feature creates a complete RGB lighting

ecosystem with Philips Evnia Ambiglow across all devices that ultimately caters to a customisable user experience.

AMD FreeSync™ Premium Pro



Gaming shouldn't be a choice between choppy gameplay or broken frames. AMD FreeSync™ Premium Pro provides the true HDR gaming experience: a combination of smooth gaming at peak performance and exceptional high dynamic range visuals while still maintaining low latency.



Gaming Monitor

QD OLED gaming monitor

49M2C8900L/00

Specifications

Picture/Display

Panel Size: 48.9 inch / 124.3 cm
Aspect ratio: 32:9
Monitor Panel Type: QD OLED
Pixel pitch: 0.233 x 0.233 mm
Brightness: SDR: 250 (APL 100%) nit, HDR : 450 (APL 10%) nit, HDR E/P: 1000 (APL 3%) nit
Display colours: Colour support 1.07 billion colours (10-bit)
Colour gamut (typical): NTSC 127.4%*, sRGB 153.1%*, Adobe RGB 125.2%*
Colour gamut (min.): DCI-P3: 99%*
Contrast ratio (typical): 1,000,000:1
SmartContrast: Mega Infinity DCR
Response time (typical): 0.03 ms (Grey to Grey)*
Viewing angle: @ C/R > 10, 178° (H)/178° (V)
Picture enhancement: SmartImage game
Maximum resolution: 5120 x 1440 @ 144 Hz (DP) 5120 x 1440 @ 60 Hz (HDMI)
Effective viewing area: 1196.7 (H) x 339.2 (V) - at a 1800R curvature*
Scanning Frequency: kHz (H)/48 - 144 Hz (V) sRGB
Delta E: < 2 (sRGB)
Flicker-free
Pixel Density: 108.77 PPI
LowBlue Mode
Display Screen Coating: Anti-reflection, 2H
Low Input Lag
AMD FreeSync™ technology: Premium Pro G-SYNC
HDR: DisplayHDR True Black 400 certified
Ambiglow: 3 sided
Pixel format: RGB Q-Stripe*
Stark ShadowBoost
Clear MR Tier: 8000
Windows Dynamic Lighting

Connectivity

Signal Input: HDMI 2.0 x 2, DisplayPort 1.4 x 1, USB-C x 1 (DP Alt mode, Power Delivery)
Sync Input: Separate Sync
Audio (In/Out): Audio out
HDCP: HDCP 2.3 (HDMI/DisplayPort/USB-C), HDCP 2.2 (HDMI/DisplayPort/USB-C), HDCP 1.4 (HDMI/DisplayPort/USB-C)
USB Hub: USB version 3.2 Gen1/5 Gbps, USB-B upstream x 1, USB-A downstream x 4 (with 2 for fast charging)

Power Delivery

Max power delivery: USB-C up to 90 W (5 V/3 A, 7 V/3 A, 9 V/3 A, 10 V/3 A, 12 V/3 A, 20 V/3.25 A, 20 V/4.5 A)
Version: USB PD version 3.0

Convenience

Built-in Speakers: 7.5 W x 4, DTS
Plug and Play Compatibility: DDC/CI, Mac OS X, sRGB, Windows 11/10/8.1/8
User convenience: Power On/Off, Menu/OK, Input/Up, Game Settings/Down, SmartImage game/Back
OSD Languages: Brazil Portuguese, Czech, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Simplified Chinese, Swedish, Turkish, Traditional Chinese, Ukrainian
Other convenience: Kensington lock, VESA mount (100 x 100 mm), VESA bracket
MultiView: PIP/PBP mode, 2 x devices
KVM
Low blue light: Low blue light compliance*

Sound

Output Power: 30 W, 2.2 Channel
Sound Enhancement: DTS Sound
Speaker Configuration: 7.5 W x 2 tweeters, 7.5 W x 2 woofers with flow port

Stand

Height adjustment: 120 mm
Swivel: +/- 20 degree
Tilt: -5/15 degree

Power

Power supply: Internal, 100–240 VAC, 50–60 Hz
Off mode: 0.3 W (typ.)
On mode: 156.50 W (typ.)
Standby mode: 0.5 W (typ.)
Power LED indicator: Operation - White, Standby mode - White (flashing)
Energy Label Class: G

Dimensions

Packaging in mm (W x H x D): 1290 x 300 x 475 mm
Product without stand (mm): 1195 x 369 x 181 mm
Product with stand (max height): 1195 x 544 x 359 mm

Weight

Product with packaging (kg): 19.41 kg
Product with stand (kg): 13.96 kg
Product without stand (kg): 10.82 kg

Operating conditions

Altitude: Operation: +12,000 ft (3658 m), Non-operation: +40,000 ft (12,192 m)
Temperature range (operation): 0°C to 40 °C
MTBF: 30,000 hour(s)
Relative humidity: 20%-80 %
Temperature range (storage): -20°C to 60 °C

Sustainability

Environmental and energy: RoHS
Recyclable packaging material: 100 %
Specific Substances: Mercury free, PVC/BFR free housing

Compliance and standards

Regulatory Approvals: CB, CE Mark, FCC Class B, ICES-003, TUV/ISO9241-307, TUV-BAUART, EAC

Cabinet

Colour: White
Finish: Textured

What's in the box?

Cables: HDMI cable, DisplayPort cable, USB upstream cable, USB-C to USB-C cable, Power cable
Monitor with stand
User Documentation
Accessory: Remote control, VESA bracket

* For best output performance, please always ensure that your graphic card is capable of achieving the maximum resolution and refresh rate of this Philips display.

* DCI-P3 Coverage based on CIE1976

* NTSC Area based on CIE 1976

* sRGB Area based on CIE1931

* Adobe RGB Area based on CIE1976

* For USB-C power and charging function, your Notebook/device must support USB-C standard Power Delivery specifications. Please check with your Notebook user manual or manufacturer for more details.

* For Video transmission via USB-C, your Notebook/device must support USB-C DP Alt mode

* The monitor may look different from feature images.

* 2020 Advanced Micro Devices, Inc. All rights reserved.

AMD, the AMD Arrow logo, AMD FreeSync™ and combinations thereof are trademarks of Advanced Micro Devices, Inc. Other product names used in this publication are for identification purposes only and may be trademarks of their respective companies.

* Radius of the arc of the display curvature in mm

* The ratio of display emission light in the range from 415 - 455 nm to the display emission of 400 - 500 nm shall be less than 50%.

* Active pixels: 5120 (H) x 1440 (V). Number of total pixels: 5136 (H) x 1456 (V); extra 8 pixels on each side, space reserved for pixel orbiting.

* Response time value equal to SmartResponse. The measurement pattern is 1 horizontal line.

* The products and accessories listed on this leaflet may differ by country and region.

* This monitor strives for sustainability: the stand's feet are made with 35% recycled plastic.

