




### Silver Crow – enter a new dimension

The 27" G-MASTER GB2730QSU known as Silver Crow opens you to a whole new level of gaming experiences. As the 2560x1440 display offers 77% more on-screen space than a standard 1920x1080 Full HD monitor, the Silver Crow makes sure all the finest details are displayed with perfect image clarity. Nothing will skip your attention. The blue light reducer function along with the flicker free panel are the shield your eyes need to guarantee your vision remains well protected. Armed with FreeSync technology and 1ms response time the Silver Crow is ready to lead you into the toughest battles, leaving nothing to chance.

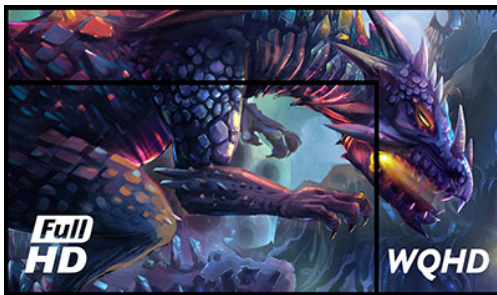

WQHD

With the 2560x1440 WQHD resolution offering 77% more on-screen space than a standard 1920x1080 full HD monitor, nothing skips your attention.



FreeSync™ Technology

AMD FreeSync™ technology puts an end to choppy gameplay and broken frames with fluid, artifact-free performance at virtually any framerate.

## 01 DISPLAY CHARACTERISTICS

Diagonal	27", 68.5cm
Panel	TN LED, matte finish
Native resolution	2560 x 1440 @75Hz (3.7 megapixel WQHD, DisplayPort)
Aspect ratio	16:9
Panel brightness	350 cd/m <sup>2</sup>
Static contrast	1000:1
Advanced contrast	80M:1
Response time (GTG)	1ms
Viewing zone	horizontal/vertical: 170°/160°, right/left: 85°/85°, up/down: 80°/80°
Colour support	16.7mIn (sRGB: 99%; NTSC: 72%)
Horizontal Sync	30 - 89kHz
Viewable area W x H	596.7 x 335.7mm, 23.5 x 13.2"
Pixel pitch	0.233mm
Colour	matte, black

## 02 INTERFACES / CONNECTORS / CONTROLS

Signal input	DVI x1 (max. 2560 x 1440 @60Hz) HDMI x1 (v.1.4, max. 2560 x 1440 @70Hz) DisplayPort x1 (v.1.2, max. 2560 x 1440 @75Hz)
USB HUB	x2 (v.3.0 DC5V, 900mA)
HDCP	yes
Headphone connector	yes

## 03 FEATURES

Blue light reducer	yes
Flicker free	yes
FreeSync support	DisplayPort: @48-75Hz
OSD languages	EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL
Control buttons	Power, Menu/ Select, Scroll up/ Volume, Scroll down/ ECO, Exit, Input
User controls	picture adjust (contrast, brightness, OverDrive, ACR, ECO, blue light reducer, black tuner, saturation, gamma), input select, audio adjust (volume, mute, audio input), store user setting, colour, image adjust (i-Style colour, sharp and soft, HDMI RGB range, video mode adjust), language, setup menu (OSD position, OSD time out, opening logo, FreeSync), display information, reset
Speakers	2 x 2W
Convenience	Kensington-lock™ prepared, DDC2B, Mac OSX

## 04 MECHANICAL

Display position adjustments	height, pivot (rotation), swivel, tilt
Height adjustment	150mm
Rotation (PIVOT function)	90°
Swivel stand	90°; 45° left; 45° right
Tilt angle	23° up; 5° down
VESA mounting	100 x 100mm
Cable management system	yes

## 05 ACCESSORIES INCLUDED

Cables	power, USB, HDMI, DP
Other	quick start guide, safety guide

## 06 POWER MANAGEMENT

Power supply unit	internal
Power supply	AC 100 - 240V, 50/60Hz
Power usage	30W typical, 0.5W stand by, 0.3W off mode

## 07 SUSTAINABILITY

Regulations	CE, TÜV-GS, EAC, RoHS support, ErP, WEEE, REACH, UKCA
Energy efficiency class (Regulation (EU) 2017/1369)	F
REACH SVHC	above 0.1%: Lead

## 08 DIMENSIONS / WEIGHT

Product dimensions W x H x D	613.5 x 400 (550) x 252mm
Weight (without box)	5.8kg
EAN code	4948570121991

