




Basic Rack PDU AP7553

Overview

The APC Basic Rack PDU distributes power to devices in the rack.

Outlets. The Rack PDU has twenty IEC-320-C13 outlets, and four IEC-320-C19 outlets.

Power cord. The 10-foot (3.05-meter) power cord terminates with a IEC-309 32 A connector.

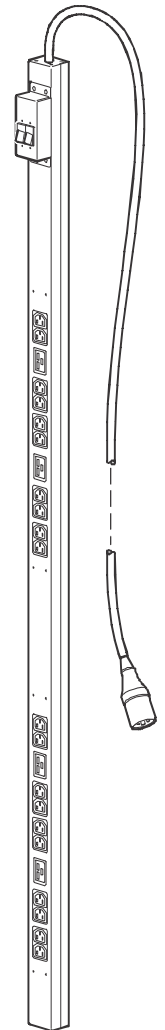

Specifications for AP7553

Electrical

Input connector	IEC-309 32 A plug
Output connectors	20 – IEC-320-C13, 4 – IEC-320-C19 outlets
Nominal input voltage	230 VAC
Acceptable input voltage	± 10% of normal voltage
Input frequency	49–63 Hz

Physical

Size (H × W × D)	63.75 × 2.19 × 1.73 in (161.92 × 5.56 × 4.39 cm)
Shipping Dimensions (H × W × D)	84.00 × 6.00 × 5.00 in (213.36 × 15.24 × 12.7 cm)
Weight	12.25 lb (5.56 kg)
Shipping weight	14.25 lb (6.46 kg)

Environmental

Elevation (above MSL)	
Operating	0–15,000 ft (0–4500 m)
Storage	0–50,000 ft (0–15 000 m)
Temperature	
Operating	–5 to 45° C (23 to 115° F)
Storage	–25 to 65° C (–13 to 149° F)
Humidity	
Operating	5–95% RH non-condensing
Storage	5–95% RH non-condensing

Compliance

Safety verification	UL-EU, CE, RCM, EAC, CMIM, UKCA
---------------------	---------------------------------