



EV2781-WT

Your advantages


Energy-saving, ergonomic and reliable, the EV2781 shines with its picture quality. It receives the image signal, audio and USB data via its USB-C interface. The 70 W power delivery via USB-C is particularly practical. Here, notebooks can be connected and powered quickly and conveniently with just one cable. DisplayPort and HDMI inputs as well as four USB downstream ports complete the extensive connectivity options. This convenient multi-purpose connectivity simplifies a quick move when users use different workstations in the office or switch between office and home office. A picture-by-picture mode even allows simultaneous display of different signal sources. Useful when two computers are connected. The IPS LCD of the EV2781 offers a resolution of 2560 x 1440 pixels - this corresponds to a pixel density of 109 ppi for optimal readability. Matte anti-glare and Auto EcoView brightness control create a glare-free view, while sophisticated hybrid LCD backlight control ensures flicker-free viewing. The EV2781 can be rotated, swivelled and tilted in the way that is most comfortable for the back, neck and sitting posture. Its virtually bezel-less design provides a refined aesthetic. Controls, brightness sensor and speakers are integrated into the slim front bezel.





Cutting-edge connectivity with USB-C

A single USB-C cable is all that is needed to provide video and audio reproduction, transfer data quickly and supply power to the connected devices. The 70 W power supply via USB-C is highly practical and can reliably charge small computers or laptops. This creates more space on your desk since you no longer need an additional power supply for your computer.

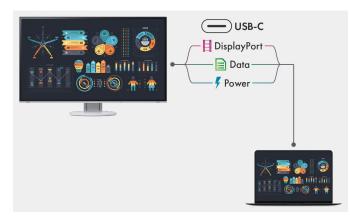


One monitor, many ports

It doesn't get simpler than this: Most end devices, such as PCs, laptops and cameras, can be connected directly to the monitor, thanks to its wide range of signal interfaces. The screen also features four USB type A 3.1 ports. This allows different devices such as mice, keyboards and headsets to be connected. This makes your everyday work easier and guarantees a tidy desk.



Picture by Picture


Picture-by-Picture mode enables different signal sources to be viewed independently on a single screen. You can select from five different views at the press of a button. You can quite conveniently display multiple applications in different layouts and sizes and use the Picture-by-Picture mode in Windows and Mac operating systems simultaneously where necessary.



Elegant design

The monitor's appearance can be the key to creating a pleasant working atmosphere. Whether you are at home or in the office, the monitor's virtually frameless design and ergonomic functionality allows it to fit naturally into your workplace environment. The housing is available in both an elegant black and in white, with matching white cables.

Incidentally, the EV2781 is an ideal match for daisy-chain multiscreen systems with its sister model, the EV2795. The housing design and stand are identical.

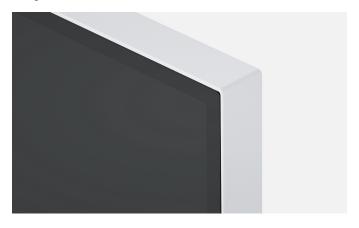




Controls integrated into bezel

Electrostatic switches are integrated into the front of the EV2781-WT instead of mechanical buttons. This ensures ease of use while also giving the monitor an extremely elegant look. The speakers and all the controls are also built into the bezel, pointing forward in the direction of the user. They are fully integrated into the monitor's flat, nearly frameless design to offer an excellent user experience.



Maximum image quality thanks to the IPS panel

The monitor is capable of all three key elements of excellent image quality: excellent resolution of 2560×1440 pixels, maximum contrast of 1000:1, and stable brightness of up to 350 cd $/m^2$. That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with LED backlight, contrasts and colours remain stable from every viewing angle.

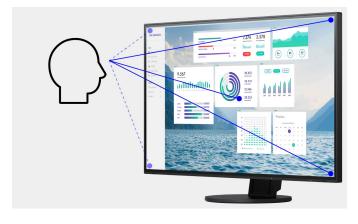

Precise colour control

An image can only be perfect if the colours are, too. This is why EIZO monitors have a 10-bit look-up table at a minimum, which allows the colour information to be assigned much more precisely than with conventional 8-bit LUTs. The finest colour gradations ensure that gradients are always perfectly displayed, while also offering customised adjustment options. For example, you can adjust the white balance from 4000 K to 10000 K in 500-K intervals.



Look-Up-Table with 10 and more bit



Look-Up-Table with 8 bit

Overdrive to quickly change images

Fast, faster, overdrive. The overdrive function accelerates switching time so that the grey-grey change takes only 5 ms on average. You can watch films and rapidly changing images without annoying afterglow.



Without overdrive: streaking and time delay

Flicker free: for the sake of the eyes

To help protect your eyes, EIZO has developed a hybrid technology to control the backlight. This combines the benefits of the otherwise standard PWM (pulse width modulation) and DC (direct current) control. The PWM control uses much higher frequencies than standard PWM methods. The result: a flicker-free viewing experience while maintaining picture quality and colour stability. In addition, compared to pure DC control, you can adjust the brightness to less than 1% of the maximum value in darkly lit rooms. The benefit: Your screen remains free from glare even under these conditions.

The flicker-free and low blue light content of the EIZO FlexScan monitors is certified by TÜV Rheinland. Learn more about why eyes get tired when working at the computer.



Save electricity and your eyes with Auto EcoView

At day, at night, bright, dark: No matter when and how you work, the Auto EcoView function continuously measures changes of the ambient light and optimises the monitor with ideal brightness values automatically by using a sensor. The benefits: Annoying glare is reduced, your eyes will not get tired as quickly. A special two-point control takes into account the brightest and darkest environment over the course of the day with the respectively desired screen brightness. Another advantage: Thanks to the automatic brightness adjustment, you will save up to 50% of your electricity costs in comparison to a monitor that is permanently operated at maximum brightness.

Of course, you can also continue to configure the monitor manually. EcoView Index is used for orientation on how environmentally friendly and economical your settings are.






During the day

In the evening


Flexible stand

Ergonomic and stable: the adjustable stand has ergonomics in focus. You can turn, swivel, and tilt the monitor in the way that is most comfortable for your back, neck and sitting posture. It can be continuously adjusted in height and lowered almost to the table or the base of the stand. This allows you to position the top row of the picture ergonomically below eye level.

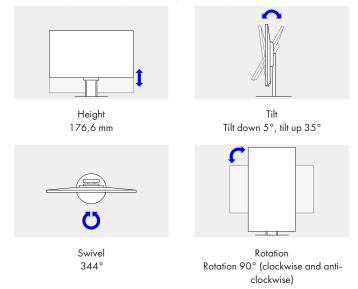


Anti-glare coating: more image, less reflection

The EV2781-WT offers a perfect, non-glare surface. By minimising glare by diffusing the reflected light, the EV2781-WT effectively protects your eyes from straining. This keeps your eyes from getting as tired and allows you to sit comfortably in front of the monitor, without having to sit in a forced position to prevent glare.



Preset colour modes: optimised display at the touch of a button


Pre-set colour modes optimise the viewing of images, texts or films. Because it makes a difference whether you are watching a film, editing a picture, surfing the net, or writing texts. At the touch of a button, you set the respective pre-set for brightness, gamma correction and colour temperature. For example, the Paper mode simulates the pleasant contrast of printed paper, which is easy on the eyes when reading and prevents fatigue.





Monitor Configurator for company-wide monitor setting

Workload reduction for administrators: The software allows you to create a default setup for all relevant monitor settings. This setup can be distributed to the connected monitors via the local network which facilitates the roll-out process.

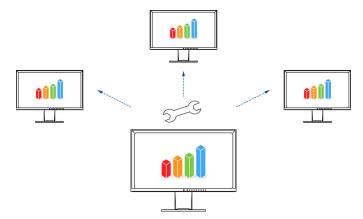

Screen InStyle

In addition to the on-screen menu, you can conveniently control the EV2781-WT by using the Screen InStyle software on a Windows PC. The configuration options include colour reproduction, energy saving options, and ergonomic functions. In multi-screen systems, the settings can be applied synchronously to all connected screens with Screen InStyle.

Learn more about Screen InStyle here.

System administrators can centrally manage and control monitors connected in the network with Screen InStyle installed using the Screen InStyle Server application. This optimises power consumption and simplifies asset management of the monitors. Learn more about Screen InStyle Server here.

Operation made easy thanks to the Button Guide

The Button Guide provides all functions at a glance. Touching the button is enough and the screen will show all functions and the corresponding control panel.



Zero-watt consumption thanks to the power switch

The monitors have an integrated mechanical power switch, which is extremely practical and energy-saving: If you switch off the monitor using the power switch, the device will stop consuming any power at all. Moreover, it consumes a maximum of 0,5 watt in standby mode.



Environmentally and socially conscious production

EIZO uses the EV2781-WT to showcase how image and product quality go hand in hand with responsible planning, material procurement and production. This intrinsic value enables you to make a safe investment in a modern and reliable monitor.



Save up to 30% of energy with the EcoView Optimizer

Save electricity without compromising quality: The EcoView Optimizer reduces the background lighting fully automatically for dark images. This reduces electricity consumption by up to 30%. At the same time, the signal is amplified and the colour tone values adjusted. The result: You will enjoy the image quality you are used to but consume less power.



Socially responsible production

The EV2781-WT is produced in a socially responsible way. It is free of child labour and forced labour. Suppliers along the supply chain have been carefully selected and they have also committed themselves to produce in a socially responsible way. This applies in particular to conflict minerals. We present a detailed report about our social responsibility annually and voluntarily.

Learn more about responsible corporate behaviour at EIZO here.



Environmentally and climate friendly

Each EV2781-WT is manufactured in our own factory, which implements an environmental management system in accordance with ISO 14001. This includes measures to reduce waste, wastewater and emissions, resource and energy consumption, as well as to encourage environmentally conscious behaviour among employees. We publicly report on these measures on an annual basis as a main component of our CSR (Corporate Social Responsibility) report.



Sustainable and durable

The EV2781-WT is designed for a long service life that takes into account the entire lifecycle and impact on the environment. It is generally well above the five-year guarantee. Spare parts are available up to five years after the end of production. The monitor's long service life and the ability to repair it save resources and the climate. When designing the EV2781-WT we paid attention to reducing resource consumption by using high-quality components and materials and being meticulous in production. The packaging of the EV2781-WT consists of cardboard box made of 85% recycled paper, while the transport padding is even 100% recycled material.





Environmentally friendly use of materials

The EV2781-WT is made of more than 60% recycled plastic. This reduces the amount of plastic waste entering the environment, conserves resources and promotes the reuse of materials.

Reducing the use of volatile organic compounds (VOCs) in material production, such as those found in certain paints and varnishes, is also of global interest.

Through years of research, EIZO has succeeded in achieving a smooth, homogeneous colour and texture in its monitor housings without the use of varnish.



Environmentally friendly packaging

For the packaging of the EV2781-WT, EIZO says goodbye to plastic and polystyrene to reduce environmental impact. Instead, the monitor is securely packaged with moulded pulp made from recycled cardboard and newsprint. The enclosed cables are in cellulose cloths instead of plastic bags.



Left: conventional packaging / Right: environmentally friendly materials

Compliance with standards and guidelines

The monitor is certified according to important and all-encompassing sustainability standards such as TCO Certified Generation 9, EPEAT and ENERGY STAR[®]. The EV2781-WT is a safe investment, when taking into account issues such as ESG (Environmental, social and corporate governance) or SDG (Sustainable Development Goals) from the United Nations and following the necessary guidelines.



Five-year warranty

EIZO grants a five-year warranty*. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative monitor technology, made from high-end materials.

* in Belgium: including on-site replacement service





General		Electric data	
tem no.	EV2781-WT	Frequency	USB-C: 31-89 kHz/59-61 Hz, DisplayPort: 31-89 kHz
Case color	White		59-61 Hz, HDMI: 31-89 kHz/ 49-51 Hz/59-61 Hz
Areas of application	Office, Gaming	Power consumption (typical) [in watt]	18
Product line	FlexScan	Maximum Power Consumption [in	153 (at maximum brightness with all signal inputs and U
EAN	4995047063445	watt]	ports in use)
Variants	EV2781-BK (Colour: Black)	Power Save Mode [in watt]	0,5
		Power consumption off [in watt]	0
Display		Energy efficiency class	D
Display		Energy consumption/1000h [in kWh]	17
Screen size [in inches]	27	Power supply	AC 100-240V, 50/60Hz
Screen size [in cm]	68,5	Power management	\checkmark
Format	16:9		
Viewable image size (width x height)	597 x 336	Dimensions & weights	
Ideal and recommended resolution	2560 x 1440	Dimensions [mm]	611 x (369 - 545) x 230
Pixel pitch [mm]	0,233 x 0,233		8,5
Pixel density [in ppi]	109	Weight [in kilograms]	
Resolution supported	2560 x 1440, 1920 x 1200, 1920 x 1080 (Full HD),	Dimensions without stand [mm]	611 x 357 x 56
	1680 x 1050, 1600 x 1200, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480	Weight without stand [in kilograms]	5,7 Dispersion derivier (PDE)
Den el te churche au		Housing dimension details	Dimension drawing (PDF)
Panel technology	IPS	Swivel	344 °
Max. viewing angle horizontal	178 °	Incline forward/backward	5°/35°
Max. viewing angle vertical		Pivot	90° (clockwise and anti-clockwise)
Number of colours or greyscale	16.7 million colours (USB-C, 8 Bit), 16.7 million colours (DisplayPort, 8 Bit), 16.7 million colours (HDMI, 8 Bit)	Height adjustment range [mm]	176,6
Colour palette/look-up table	More than 1.06 billion hues/14-bit	Hole spacing	VESA standard 100 x 100 mm
Max. colour space (typical)	sRGB		
Max. brightness (typical) [in cd/m ²]	350	Certification & standards	
	1000:1	Certification	CE, CB, UKCA, TCO Certified Generation 9, EPA EN-
Max. dark room contrast (typical)	5		ERGY STAR [®] , TÜV/GS, TÜV/Ergonomics (including ISO 9241-307)** TÜV/Bue low Light Content TÜV/Elicker
Response time grey-grey alternation (typical) [in ms]	5		9241-307)**, TÜV/Blue Low Light Content, TÜV/Flick Free, EPEAT 2018 (US), cTÜVus, TÜV/S, EAC, PSE, FC
Max. refresh rate [in hertz]	60		B, CAN ICES-3 (B), RCM, VCCI-B, CCC, RoHS, China
Backlight	LED		RoHS, WEEE
Features & control		Software & accessories	
Features & control USB-C docking	✓	Accompanying software and other ac-	Screen InStyle
	sRGB, Paper, DICOM, Movie, 2x additional memory spaces		Power cord, Signal cable USB-C – USB-C (5 A), Quick
USB-C docking	sRGB, Paper, DICOM, Movie, 2x additional memory	Accompanying software and other ac- cessories are available for download Additional supply	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection
USB-C docking Preset colour/greyscale modes	sRGB, Paper, DICOM, Movie, 2x additional memory spaces	Accompanying software and other ac- cessories are available for download	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without
USB-C docking Preset colour/greyscale modes DICOM tone curve	sRGB, Paper, DICOM, Movie, 2x additional memory spaces	Accompanying software and other ac- cessories are available for download Additional supply	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT
USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes	sRGB, Paper, DICOM, Movie, 2x additional memory spaces	Accompanying software and other ac- cessories are available for download Additional supply	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT (Short USB-C port cable, 100 cm), CP200-WT (USB-C
USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView	sRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII	Accompanying software and other ac- cessories are available for download Additional supply	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort
USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index	sRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII	Accompanying software and other ac- cessories are available for download Additional supply	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPort
USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer	sRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII	Accompanying software and other ac- cessories are available for download Additional supply	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPo cannection cable, 100 cm), PCSK-03-WT (Thin client
USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive	sRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII	Accompanying software and other ac- cessories are available for download Additional supply	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPort
USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls	sRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII	Accompanying software and other ac- cessories are available for download Additional supply Accessories	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPo cannection cable, 100 cm), PCSK-03-WT (Thin client
USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI)	sRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII VIII V	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-VT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPor connection cable, 100 cm), PCSK-03-WT (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5)
USB-C docking Preset colour/ greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder	sRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII VIII VIII	Accompanying software and other ac- cessories are available for download Additional supply Accessories	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPort cannection cable, 100 cm), PCSK-03-WT (Thin client
USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Picture-by-Picture	sRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII VIII VIII	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-VT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPort connection cable, 100 cm), PCSK-03-WT (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5)
USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Picture-by-Picture Built-in speakers	sRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII VIII VIII	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPort connection cable, 100 cm), PCSK-03-WT (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5)
USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Picture-by-Picture	sRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII VIII VIII	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-VT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPort connection cable, 100 cm), PCSK-03-WT (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5)
USB-C docking Preset colour/ greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Picture-by-Picture Built-in speakers OSD language	sRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII VIII VIII VIII VIII VIII VIII VI	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPo connection cable, 100 cm), PCSK-03-WT (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5) 5 years warranty*
USB-C docking Preset colour/ greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Picture-by-Picture Built-in speakers OSD language Adjustment options	sRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII VIII VIII VIII VIII VIII VIII VI	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPo connection cable, 100 cm), PCSK-03-WT (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5) 5 years warranty*
USB-C docking Preset colour/ greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Picture-by-Picture Built-in speakers OSD language Adjustment options	sRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII VIII • • • • • • • • • • • • • • •	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPo connection cable, 100 cm), PCSK-03-WT (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5) 5 years warranty*
USB-C docking Preset colour/ greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Picture-by-Picture Built-in speakers OSD language Adjustment options Button Guide Integrated power unit	sRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII VIII • • • • • • • • • • • • • • •	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPor connection cable, 100 cm), PCSK-03-WT (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5) 5 years warranty*
USB-C docking Preset colour/ greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Picture-by-Picture Built-in speakers OSD language Adjustment options Button Guide Integrated power unit	SRGB, Paper, DICOM, Movie, 2x additional memory spaces	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPo connection cable, 100 cm), PCSK-03-WT (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5) 5 years warranty*
USB-C docking Preset colour/ greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Picture-by-Picture Built-in speakers OSD language Adjustment options Button Guide Integrated power unit Ports Signal inputs	SRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII VIII VIII VIII VIII VIII VIII VI	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPo connection cable, 100 cm), PCSK-03-WT (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5) 5 years warranty*
USB-C docking Preset colour/ greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Picture-by-Picture Built-in speakers OSD language Adjustment options Button Guide Integrated power unit Ports Signal inputs USB specification	SRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII VIII A A A A A A A A A A A A A	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPo connection cable, 100 cm), PCSK-03-WT (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5) 5 years warranty*
USB-C docking Preset colour/ greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Picture-by-Picture Built-in speakers OSD language Adjustment options SIGN and Some and Som	SRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII VIII A A A A A A A A A A A A A	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPo connection cable, 100 cm), PCSK-03-WT (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5) 5 years warranty*
USB-C docking Preset colour/ greyscale modes DICOM tone curve RadiCS application classes Auto EcoView CoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Picture-by-Picture Built-in speakers OSD language Adjustment options Signal Inputs USB specification USB upstream ports USB downstream ports USB downstream ports USB downstream ports USB application	SRGB, Paper, DICOM, Movie, 2x additional memory spaces VIII VIII VIII Second State	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), CC100-WT (Short USB-C port cable, 100 cm), CP200-WT (USB-C to DisplayPort cable, 200 cm), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP200 (DisplayPort cable, 200 cm), PP100-K (Short DisplayPort cannection cable, 100 cm), PCSK-03-WT (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5) 5 years warranty*

EIZO Austria GmbH

Pfarrgasse 87 A-1230 Vienna

Phone: +43 (0) 1 615 28 86 - 10 www.eizo.at

Data sheet created on 21.08.2022