


# **Key Features**

- Write Away quick-start annotation, enhanced by 50-point touch and palm rejection for precise writing.
- 70W total output power speaker system with built-in 8-microphone array, for rich, immersive audio
- EDLA-Certified with Android 14, integrated ViewSonic Education Software for seamless functionality.
- NFC and SSO sign-in for swift access to the intuitive launcher and personal settings.
- EPEAT Silver certified for enhanced energy efficiency and sustainability.



# Product **Description**

Bring energy-efficient performance to your classroom with the ViewBoard® IFP51 Series, available in sizes from 55" to 98" to suit any setup. Seamless interactivity is at your fingertips, thanks to its ultra-responsive 50-point touch technology and instant 'write away' annotation. Powered by Android 14 and EDLA-Certified, it offers secure access to Google Play apps, while NFC and SSO sign-in ensure instant access to personalized settings. Integrated ViewSonic Education Software completes the experience with tools for whiteboarding, casting, and device management—delivering a more dynamic and efficient teaching experience.

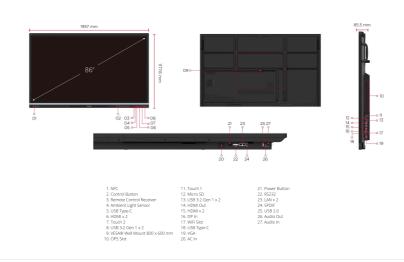

Visit Us www.viewsonic.com

:35 PM	IFP8651 Enterprise Device Licensing Agreemen
DISPLAY	
Panel Size:	86"
Panel Type:	TFT LCD Module with DLED Backlight.
Display Area (mm):	1895.04mm(H) x 1065.96mm (V) (85.6")
Aspect Ratio:	16:9
Resolution:	UHD 3840x2160
Colors:	1.07G colors
Brightness:	500 nits
Contrast Ratio:	1200:1 (typ.); 5000:1 (DCR)
Response Time:	6.5 ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	50,000 Hours (Min)
Surface Treatment:	Hardness:9H, AG+AF
Orientation:	Landscape
PLATFORM	
Processor:	Octa-Core CPU
RAM:	16GB
Storage:	128GB
тоисн	
Type/ Tech:	Ultra Fine Touch Techology (IR Recognition)
Touch Resolution:	32767 x 32767
Touch Point:	EDLA/Android/Windows: 50 points of touch
Palm Rejection:	Yes
INPUT	
HDMI:	x4 (Frontx2:HDMI2.1 with CEC,HDCP; Rearx2: [(HDMI2
RGB / VGA:	with CEC, HDCP)x1+(HDMI2.1 with CEC, HDCP, ARC)x1
	x1
DisplayPort:	x1 x1
Audio:	
RS232:	x1
SD/SDHC:	TF Card Slot(Micro SD)
OPS:	x1 PC Slot
OUTPUT	va (UDML0 4 UDOD 4 v)
HDMI:	x1 (HDMI 2.1, HDCP 1.x)
Audio:	x1 (Line out)
SPDIF:	x1 (optical)
RJ45:	x2
USB	A2
	x5 (Front x2 and Rear x 2 with USB3.2 Gen 1, all suppor
Type A:	SmartPort USB; Rear x 1 with USB 2.0 for system update
Type B:	x2 (Front x 1 and Rear x 1 with USB3.2 Gen 1)
Type C:	x3 (Frontx1 with USB3.2 Gen 1, DP1.2, Ethernet 100M,
Type C:	PD 65W; Rearx1 with USB3.2 Gen 1, DP1.2, Ethernet 100M, PD 15W; Topx1 with USB3.2 Gen 1, PD 15W)
SPEAKERS	
25W x 2 front soundbar	+ 20W x 1 subwoofer
MICROPHONE	
Built-in 8-array microph	one
TOP CAMERA PLATE	
Yes	
COMPATIBILITY	
RGB PC/HDMI PC:	1920x1080 @ 60Hz
HDMI:	3840x2160
DisplayPort:	3840x2160
EMBEDDED OS	
EDLA-certified with And	roid 14
BUNDLED SOFTWAR	E
Basic Annotation Softwa	are: myViewBoard for Android
Pro Annotation Software	e: myViewBoard for Windows (embedded in VPC)
	AirSync
Wireless Presentation:	
Device Management:	Manager
	Manager Yes
Device Management: ViewSonic Launcher:	
Device Management: ViewSonic Launcher:	
Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing bet	Yes  USB 3.2 Gen 1 "SmartPort USB" to all channels  ween IFP 10/100/1000M (USB Type-C 10/100, Android & PC
Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing bet and slot-in device:	Yes  USB 3.2 Gen 1 "SmartPort USB" to all channels  ween IFP
Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing bet and slot-in device: Light Sensor:	Yes  USB 3.2 Gen 1 "SmartPort USB" to all channels  ween IFP
Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing bet and slot-in device: Light Sensor: NFC Reader:	Yes  USB 3.2 Gen 1 "SmartPort USB" to all channels  ween IFP
Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing bet and slot-in device: Light Sensor: NFC Reader: Pen Sensor:	Yes  USB 3.2 Gen 1 "SmartPort USB" to all channels  ween IFP
Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing bet and slot-in device: Light Sensor: NFC Reader:	Yes  USB 3.2 Gen 1 "SmartPort USB" to all channels  ween IFP

### **ERGONOMICS**

Wall Mount (VESA® ): 800 x 600 **OPERATING CONDITIONS**Temperature (° C): 0°C to 40°C

# Humidity: DIMENSIONS (W X H X D)

Physical (inch / mm): 77.05 x 46.36 x 3.36 in / 1957 x 1177.6 x 85.5 mm

Packaging (inch / mm): 83.07 x 51.34 x 8.86 in / 2110 x 1304 x 225 mm

20% ~ 80% RH non-condensing

## WEIGHT

Net (lb / kg): 128.88 lb / 58.46 kg

Gross (lb / kg): 156.59 lb / 71.03 kg

#### REGULATIONS

cTUVus, FCC ID/IC ID, FCC SDoC, Energy Star 8.0, EMC/CE, CB/LVD, GOST-R/EAC, UkrSEPRO, EPEAT Silver, UK-EEL, BSMI, BIS, LBL( Low Blue Light Certification), Flicker Free, RoHS, ErP-Eco, REACH, SCIP, WEEE, TPCH, Packing waste, CA65, PAIA

## PACKAGE CONTENTS

- 1. Power Cord x1 3 meters,
- 2. USB Type-C cable x1 1.8 meters
- , USB-IF certified
- 3. USB Touch cable x1 3 meters
- 4. Touch pen (Passive pen) x 2
- 5. Quick Start Guide
- 6. RS232 adapter x1
- 7. Clamp x 5
- 8. Camera Plate x1
- 9. Screw x 8 (camera 2+2, wall mount 4)
- 10. HDMI cable x1 3meters,

(HDMI LA certified)

- 11. Remote controller x1
- 12 AAA battery x2
- 13. Compliance statement

### **COMPATIBLE SLOT-IN PC**

VPCF5-W33-G1, VPC37-W53-G1, VPC35-W53-G1, VPC-A31-O1