



Build Fast, Stable Home Networks with Gigabit Powerline Adapter




- Transform your power outlets into a fast 1800 Mbps* network
- Stable network and great coverage with MIMO technology
- Pass-through design returns you a power outlet
- Two Gigabit Ethernet ports for connecting multiple devices
- ZyXEL ONE Connect compatible**

It connects your 4K television networking players with ZyXEL's powerful PLA5456 HomePlug AV2 1800 Mbps* Powerline Ethernet adapter to stream 4K video contents smoothly and reliably to anywhere with a power outlet, thanks to its latest HomePlug AV2 technology that delivers data transfer speeds of up to 1800 Mbps*. You can also connect an additional video game console to the ZyXEL PLA5456 Powerline Ethernet adapter to enjoy a lag-free online gaming experience. Its convenient pass-through power outlet design allows you to use the same power outlet without sacrificing it.

Benefits

Fast, reliable network connection right from your power outlets

Just connect one ZyXEL PLA5456 to your Internet sharing router or gateway, and another to the devices that needs Internet connection. With the latest HomePlug AV2 technology, it is easy to build a wired network with speeds of up to 1800 Mbps* connecting the two Gigabit Ethernet ports.

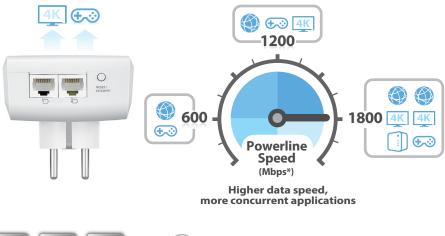

PLA5456 AV2000 HomePlug AV2 Powerline 2-port Gigabit Pass-Thru Ethernet Adapter





4K video streaming and two Gigabit Ethernet ports for network-intensive applications

Empowered by the latest HomePlug AV2 and MIMO technologies, the ZyXEL PLA5456 is offering the same networking performance as connecting directly to the router. It dramatically improves coverage through one or even two floors for Internet applications like radio, large-screen TV and Netflix 4K streaming simultaneously requested by two Gigabit Ethernet connections.




Easy setup for fast, stable and secured Internet anywhere in your home

The ZyXEL PLA5456 is very easy to connect and use even for those who are not Internet experts. Just plug and play, and you will have an instant hardwired connection anywhere in your home without having to run physical wires. Significant coverage improvement ensures fantastically stable connection across one or even two floors. Push the sync button on both PLA5456 and you get an instant, 128-bit encrypted network going through your powerline. It works like magic!



Convenient pass-through design returns you a power outlet

The ZyXEL PLA5456 offers a pass-through outlet which allows you to keep the existing powered devices connected. The embedded noise filter eliminates static from the connected electronics to further improve network quality.





ZyXEL ONE Connect to discover your home connectivity and activity

With ZyXEL ONE Connect router, you can detect your home network devices through ONE Connect app** installed to your mobile device.



Specifications

System Specifications

Standard

- Compliant with HomePlug AV2
- IEEE 1901 and HomePlug AV standard

Powerline Data Rate

- Transmit: up to 1800 Mbps*
- Receive: up to 1800 Mbps*

Access Methods

CSMA/CA channel-access schemes

HomePlug Modulation

- OFDM symbol modulation
- QAM 4096/1024/256/64/16
- QPSK, BPSK, ROBO carrier modulation schemes

Range

Max. range up to 300 meters over power line

Security

• 128-bit AES encryption

Quality of Service (QoS)

• Supports up to 4-level type QoS

Frequency Band

• 2 MHz to 86 MHz

IGMP

• IGMP v1/v2/v3

System Requirements

- Operating system independent:
- Ethernet: RJ-45
- Utility software OS support:
- Microsoft Windows XP/Vista/7/8

Hardware Specifications

Powerline network guality:

LED indicators:

- Green: Best

- Red: Good

- Amber: Better

Ethernet link/activity

Encrypt/Reset button

Full operation: 6 watt max.

Power consumption:

• Power rating: 100 to 240 V AC, 50/60 Hz

- Ethernet interface: Two 10/100/1000 Mbps RJ-45 connectors with auto MDI/MDIX support
- J- Item dimensions (WxDxH): 133.5 x 71.1 x 38.6 mm (5.25" x 2.79" x 1.51")

Physical Specifications

- Item weight: 230 g (0.5 lb.)
 - Packing dimensions (WxDxH):
 - 231 x 185 x 95 mm (9.09" x 7.28" x 3.74")
 - Packing weight: 788 g (1.71 lb.)(twin pack)

Environmental Specifications

Operating Environment

- Temperature: 0°C to 40°C (32°F to 104°F)
- Humidity: 10% to 90% (Non-condensing)

Storage Environment

Temperature: -30°C to 70°C (-22°F to 158°F)
Humidity: 10% to 95% (Non-condensing)

Certification

- Safety: CE-LVD, BSMI
- EMC: CE, FCC, ICES, BSMI

Packing Contents

- 2 Powerline Ethernet Adapters
- 2 Ethernet cables
- Quick start guide
- Warranty card
- * The theoretical maximum channel data transfer rate is derived from HomePlug AV2 specifications. Actual data transfer rate will vary from network environment including: distance, network traffic, noise on electrical wires, quality of electrical installation and other adverse conditions.

** ZyXEL ONE Connect router is required for all features on this app.

Socket/Connector: EU: Type F (CEE 7/4)/Type F (CEE 7/4) Max power rating: 16 A 250 V ~

• Button:


- DE, NL, ES, PT, AT, SE, FI, NO, GR, HU, LU
- UK : Type G (BS 1363)/Type G (BS 1363)
- Max power rating: 13 A 250 V~
 UK, CY, HK
- US: Type B (NEMA 5-15)/Type B (NEMA 5-15)
 - Max power rating: 15 A 120 V~
- CH: Type J CEE 7/16/Type J CEE 7/16 - Max power rating: 10 A 250 V~




Rear Panel







Application Diagram

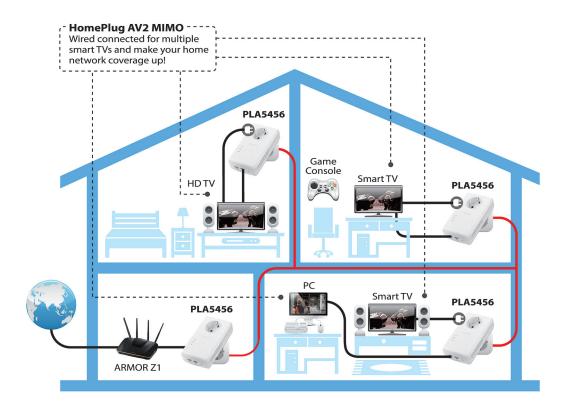

For more product information, visit us on the web at www.ZyXEL.com



FC CED is Copyright © 2015 ZyXEL Communications Corp. All rights reserved. ZyXEL, ZyXEL logo are registered trademarks of ZyXEL Communications Corp. All other brands, product names, or trademarks mentioned are the property of their respective owners. All specifications are subject to change without notice.