

Robust A4 print solutions

These A4 printers set new benchmarks for speed and resilience. Their robust performance will enhance productivity and enable your business to meet critical deadlines.

Productive, non-stop performance

- 55 & 60 ppm print speeds
- Non-stop performance
- Up to 2600 sheets
- 1200 dpi image quality


Running at speeds of 55 and 60 pages a minute and with stacks of paper on line, Ricoh's P 800 and P 801 mono A4 printers will easily handle the most demanding high speed / high volume workgroup print requirements. And, what is more, with their long-life parts and high yield toner cartridges offering hassle-free and maintenance-free performance, they will go on and on and on.

Powerful Intel-based controller

- Fast job processing
- Uniform workflow
- Remote support
- Tap and go security

These A4 printers can be positioned at the very heart of your operation. Compact, easy to use and utterly reliable, they produce high quality print communication, quickly and without fuss. The energy efficient printers comply with Blue Angel Mark (BAM) environmental standards, and with their long-life parts offering maintenance-free performance and high yield toner cartridges reducing running costs, they are arguably the most effective and affordable A4 mono printers available today.



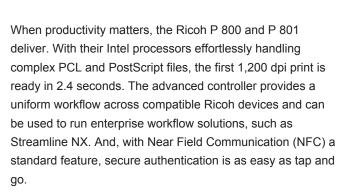

Quietly effective and affordable

- Space-saving design
- BAM compliant
- Maintenance free
- Low running costs



RICOH P 800/P 801

MAIN SPECIFICATIONS

| GENERAL | P 800 | P 801 | | |
|---|---|--------------------|--|--|
| Warm-up time | 25.4 seconds | | | |
| First output speed: B/W | 2.4 seconds | | | |
| Continuous output speed | 55 ppm | 60 ppm | | |
| Memory: standard | 2 GB 2 GB | | | |
| Memory: maximum HDD: option | 320 GB | | | |
| Weight | 18 kg | | | |
| Dimensions: W x D x H | 420 x 410 x 345 mm | 443 x 410 x 365 mm | | |
| Power source | 220 - 240 V, 50/60 H | Z | | |
| PRINTER | | | | |
| CPU | Intel® Celeron® Processor | 1.1GHz | | |
| Printer language: standard | PCL5c PCL5e | | | |
| | PCL6 | | | |
| | PostScript 3 (emulation) | | | |
| Printer language: option | Genuine Adobe ®PostScri | pt®3™ | | |
| | IPDS DDE Direct form Adult of | | | |
| Print resolution | PDF Direct from Adob | er. | | |
| Print resolution Network interface: standard | 1,200 x 1,200 dpi Ethernet 10 base-T/100 base-TX | /1000 base_T | | |
| INELWOIK INLEMACE: STANDARD | USB2.0 | 11000 0030-1 | | |
| | NFC Tag | | | |
| Network interface: option | Bi-directional IEEE 1284, | | | |
| | Wireless LAN (IEEE 802.11 | | | |
| | USB Server for Second Netwo Apple AirPrint | IK ITIETIACE | | |
| Mobile printing capability | Apple AirPrint Mopria® | | | |
| | Google Cloud Print | | | |
| | NFC | | | |
| | Ricoh Smart Device Print & Ricoh Smart Device Conr | | | |
| Windows® environments | Windows® 7 | | | |
| | Windows® 8.1 | | | |
| | Windows® 10 | | | |
| | Windows® Server 20 Windows® Server 20 | | | |
| | Windows® Server 2012 Windows® Server 2012 | | | |
| | Windows® Server 20 | 16 | | |
| Mac OS environments | Macintosh OS X Native v10. | 11 or later | | |
| UNIX environments | UNIX Sun® Solaris1 | | | |
| | HP-UX11.x11i v211i v SCO OpenServer5.0.7 | | | |
| | RedHat® Linux Enterpris | | | |
| SAP® environments | SAP® R/3® | | | |
| | SAP® S/4® | | | |
| PAPER HANDLING | | | | |
| Recommended paper size | A4 | | | |
| | A5 A6 | | | |
| | Ab B5 | | | |
| | B6 | | | |
| Paper input: standard | 600 sheets | | | |
| Paper input: bypass | 100 sheets | | | |
| Paper input: maximum | 2,600 sheets | | | |
| Paper output: standard | 500 sheets | | | |
| Paper output: maximum | 500 sheets Trays: 64 - 120 g/m | 500 sheets | | |
| Paper weight | I rays: 64 - 120 g/m Bypass: 60 - 220 g/n | | | |
| | Duplex: 64 - 120 g/n | | | |
| Paper types | Plain paper | | | |
| | Recycle paper | | | |
| | Special paper Color paper Letterhead | | | |
| | | | | |
| | Cardstock | | | |
| Preprinted paper Bond paper Coated paper | | | | |
| | | | | |
| | Gloss paper | | | |
| | Label paper Thick paper | | | |
| | OHP | | | |
| | | | | |

RICOH P 800/P 801

MAIN SPECIFICATIONS

| ECOLOGY | P 800 | P 801 | | G |
|---|---------------|-------------------|-----------------------|------------|
| Power consumption: max. | | Less than 1,400 W | Š | Adobe: PDF |
| Power consumption: operation | 716 W | 749 W | Adobe" PostScript" 3" | |
| Power consumption: sleep | | 0.48 W | | |
| TEC* * It is a reference value based on the BAM test method (Blue Angel / DE-UZ 205) | 0.74 kWh | 0.81 kWh | RO | mopria |
| OUTPUT TRAYS OPTIONS | JPTIONS | | | |
| 4x 500-sheet Paper tray | | | AirPrint | |
| CONSUMABLES | | | | |
| Starter toner | 10,000 prints | 11,000 prints | | |
| Drum | | 500,000 sheets | | |
| Toner (regular yield) | | 25,500 prints | | |
| Toner (ultra high yield) (P 801) Consumable yield measuring method ISO/IEC 19752 | - | 40,000 prints | | |

Ricoh International B.V. Prof. W.H. Keesomlaan 1 1183 DJ Amstelveen The Netherlands





All brand and/or product names are trademarks of their respective owners. Specifications and external appearance are subject to change without notice. The colour of the actual product may vary from the colour shown in the brochure. The images in this brochure are not real photographs and slight diff Copyright © 2021 Ricoh Europe PLC. All rights reserved. This brochure, its contents and/or layout may not be modified and/or adapted, copied in part or in whole and/or incorporated into other works without the prior written permission of Ricoh Europe PLC.