



# ZyWALL USG110/210/310

## Unified Security Gateway

More and more people are relying on smart devices and cloud-based applications for business communications. This means that high network availability is critical for business continuity, more WiFi is demanded in the workplace, and traditional regulatory measures for application usage are obsolete. Without an effective solution to control, optimize and block social, productivity and other Web applications, SMBs risk losing work productivity and exposing company networks to new Web threats.

The ZyWALL USG110/210/310 are UTM Firewalls designed to meet the mobility, anti-malware and policy enforcement challenges in SMBs. The integrated WLAN controller offers easy WLAN scalability for the growing demand for WiFi; while WAN and VPN load balancing and failover ensures non-stop business communications. Zyxel USGs offer industry-leading Anti-Virus, Anti-Spam, Content Filtering and Application Patrol technology for effective application optimization and comprehensive network protection.



Unified Security Firewall for small- and medium-sized businesses



Complete network protection with firewall, Anti-Virus, Anti-Spam, Content Filtering, IDP, Application Patrol



4 step setup wizard for easy remote access with robust SSL, IPSec, and L2TP over IPSec VPN connectivity.



Express Mode with advanced Cloud Query technology



Enabled hospitality features with hotspot, AP management with support for WiFi 6 feature



SecuReporter, cloud-based intelligent analytics and report service



## Benefits

### Impregnable protection and optimization

ZyWALL USG Series thoroughly protects networks with industry-leading firewall, Anti-Malware/Virus, Anti-Spam, Content Filtering, IDP, and Application Patrol functionality. Regulate unauthorized use of Web applications over your network, such as Facebook, Google apps, and Netflix, among others. Zyxel security measures are enhanced with SSL Inspection with the support for TLS 1.3, blocking threats hidden in SSL-encrypted connections while facilitating deeper policy enforcement. Furthermore, newly improved Content Filtering enhances HTTPS Domain Filter, Browser SafeSearch, and Geo IP Blocking for an array of security enhancements to ensure clean Web connections.

### Engineered Express Mode. Uncompromising performance.

ZyWALL USG series supports Express Mode with advanced Cloud Query technology which has 30 billion of file ID in Zyxel security cloud's database and constantly adapts new malware data every minute via Threat Intelligence Machine Learning. This innovative design improves the anti-malware detection efficiency, enables it to verify the file ID within seconds to get the most optimal threat detection, so that the ZyWALL USG series can gain higher throughput performance.

### Powerful, robust and always-online

ZyWALL USG Series delivers high-access quality to help businesses satisfy the demand for always-online communications. The ZyWALL USG Series features multi-WAN load balancing/failover and a comprehensive mobile broadband USB modem support list for WAN backup operations. The ZyWALL USG Series also supports IPSec load balancing and failover, providing additional resilience for mission-critical VPN failover with VTI Interface deployments.

### Multi-element service access

The ZyWALL USG Series helps SMBs meet the connectivity demands of an ever-growing legion of wireless devices. Each gateway in the series is integrated with a WLAN controller that enables users to manage up to 34 APs through a centralized user interface. Businesses can now easily scale up WLAN and provide WiFi in multiple areas, like meeting rooms and guest reception areas. Hotspot Management features — such as Billing System, Walled Garden, Multiple Authentications, 3rd Party Social Login, and User Agreement — to give businesses with a single unified solution for all required functionality.

### Comprehensive Connectivity

ZyWALL series not only can protect your network, but it also supports Hospitality features including Hotspot, AP management with integration for WiFi 6 feature, and concurrent device upgrade. You can buy time-based bundle or quantity-based license to optimize your initial investment and maximize the scale in your environment.

### Enhanced visibility

SecuReporter is a cloud-based intelligent analytics and report service with threat data collection and correlation capabilities. USG is bundled with 1-year SecuReporter service, giving 7 days of log retention and visual analytics. SecuReporter provides multiple analytical perspectives on overall Threat Trend, Spam Mail, Unsafe Website Categories, Most Frequent Security Threat (Malware, IDP, Spam) and user behaviors, delivering holistic visibility for security professionals.

### Swift and secure firmware upgrades

Locating firmware updates — not to mention identifying correct versions for your device and managing their installation — can be a complex and confusing ordeal. The ZyWALL USG Series solves this with its new Cloud Helper service. Cloud Helper provides a simple step to look for up-to-date firmware information. New firmware is immediately made available upon release from our official database to ensure its authenticity and reliability.

### Zyxel One Network experience

Aiming for relieving our customers from repetitive operations of deploying and managing a network, Zyxel One Network is designed to simplify the configuration, management, and troubleshooting, allowing our customers to focus on the business priorities. Zyxel One Network presents an easy-to-use tool, Zyxel One Network Utility (ZON Utility), to realize speed network setup. Zyxel Smart Connect allows Zyxel networking equipment to be aware and recognize each other and further facilitating the network maintenance via one-click remote functions such as factory reset or power cycling. Zyxel One Network redefines the network integration across multiple networking products from switch to WiFi AP and to Gateway.

# ZyWALL USG Series Quick Finder



| Model                                      | USG40 /40W | USG60 /60W | USG110  | USG210  | USG310  | USG1100   | USG1900   | USG2200   |
|--|------------|------------|---------|---------|---------|-----------|-----------|-----------|
| <b>Description</b>                         | SB         |            | SMB     |         |         | MB        |           |           |
| <b>Firewall throughput (Mbps)</b>          | 400        | 1,000      | 1,600   | 1,900   | 5,000   | 6,000     | 7,000     | 25,000    |
| <b>Max. concurrent sessions</b>            | 50,000     | 100,000    | 150,000 | 200,000 | 500,000 | 1,000,000 | 1,000,000 | 1,500,000 |
| <b>UTM throughput (AV and IDP, Mbps)*</b>  | 60         | 110        | 450     | 500     | 550     | 650       | 710       | 1,100     |
| <b>IDP throughput (Mbps)</b>               | 95         | 150        | 590     | 660     | 900     | 1,000     | 1,200     | 2,000     |
| <b>AV throughput (Mbps)*</b>               | 80         | 150        | 450     | 500     | 890     | 990       | 1,100     | 2,000     |
| <b>Amazon VPC*<sup>1</sup></b>             | Yes        | Yes        | Yes     | Yes     | Yes     | Yes       | Yes       | Yes       |
| <b>Microsoft Azure</b>                     | Yes        | Yes        | Yes     | Yes     | Yes     | Yes       | Yes       | Yes       |
| <b>Cloud CNM SecuReporter*<sup>2</sup></b> | Yes        | Yes        | Yes     | Yes     | Yes     | Yes       | Yes       | Yes       |
| <b>Hotspot Management*<sup>2</sup></b>     | -          | Yes        | Yes     | Yes     | Yes     | Yes       | Yes       | Yes       |
| <b>Device HA Pro</b>                       | -          | -          | Yes     | Yes     | Yes     | Yes       | Yes       | Yes       |

\*: AV (with Express Mode) and IDP throughput measured using the industry standard HTTP performance test (1,460-byte HTTP packets). Testing done with multiple flows.

\*1: ZyWALL/USG still be able to support by CLIs

\*2: With Zyxel service license to enable or extend the feature capacity

## Subscription Services

The ZyWALL USG110/210/310 provides a complete feature set to perfectly fit different business requirements as well as to enable the maximum performance and security with an all-in-one appliance. Comprehensive network modularity also empowers IT professionals to customize the system to meet their individual needs.

\*: Hotspot Management supports firmware ZLD4.25 or later.



Anti-Virus



Anti-Spam



Intrusion Detection & Prevention



Application Patrol



Content Filtering



SecuReporter



AP Controller



Hotspot Management

## Feature Highlights

### Multi-WAN & Mobile broadband

The ZyWALL USG Series provides non-stop Internet uptime with multi-WAN and mobile broadband support. Multi-WAN works with two or more Ethernet WAN connections for active-active WAN load balancing or active-passive failover. Comprehensive mobile broadband USB modems are also supported for WAN backup.

### Unified security policy

Unified security policy offers object-based management and a unified configuration interface for firewall and all security-related policies. Users can easily apply all policy criteria to every UTM feature, reduce configuration time, and get more streamlined policy management.

### Cloud Helper

Cloud helper could provide the friendly firmware upgrade, user don't need to worry where and how to receive the latest firmware information and file. And the few steps to download and update the firmware directly, it's very convenient to save the setting time.

### Zyxel One Network utility

The ZON utility features smart functions to assist network management for administrators to perform batch firmware upgrade for devices, remote reboot of devices such as ceiling APs or redirect to device GUI for further configuration with just a click. These troublesome but necessary management tasks can now be easily done through just one platform for WiFi APs, switches and gateways.

### SSL inspection

SSL inspection enables the ZyWALL USG Series to provide not only comprehensive security, but also deeper policy enforcement. It enables the USG's Application Patrol, IDP, Content Filtering and Anti-Virus to inspect traffic in SSL encrypted connections and block threats that usually go unseen.

### Robust VPN

ZyWALL USG Series support high-throughput IPSec, L2TP over IPSec and SSL VPN for a wide range of site-to-client and site-to-site VPN deployments. Reinforced with the advanced SHA-2 authentication, the ZyWALL USG Series provide the most secure VPN for business communications.

### Integrated WLAN controller

The integrated WLAN controller supports CAPWAP, and enables centralized authentication and access management of multiple APs in the network. The ZyWALL USG Series can manage 2 APs by default, and up to 34 APs with license upgrade.

### PCI DSS compliance

The ZyWALL USG Series conform Payment Card Industry Data Security Standard (PCI DSS) is a global standard for data security of cardholder data that affects a very broad group of businesses. The PCI DSS Compliance applies to all entities involved in processing of payment cards, such as merchants, card issuers, processors, and service providers, as well as those that process, transmit, or store cardholder data.


### Security analytics and report

SecuReporter features a suite of analysis and reporting tools, including network security threats identification and visual analysis on security services statistics, security events, application usage, website usage, and traffic usage. With SecuReporter Premium service, even without UTM Service, user can still have the visibility of usage. SecuReporter provides application overview including real-time usage, sent/received usage, source and destination IP. New added features provide IT manager an observation on network overview.

# Application Diagram


## Anti-malware protection and application optimization

- Enabling Anti-Virus, Anti-Spam and Intrusion Prevention, business networks gain deep, extensive protection against all types of malware threats
- Content Filtering enables businesses to deny access to Websites that are malicious or not business-related
- Application Patrol technology not only enable businesses to block or throttle non-productive Web applications, but also optimize Web applications that increase productivity

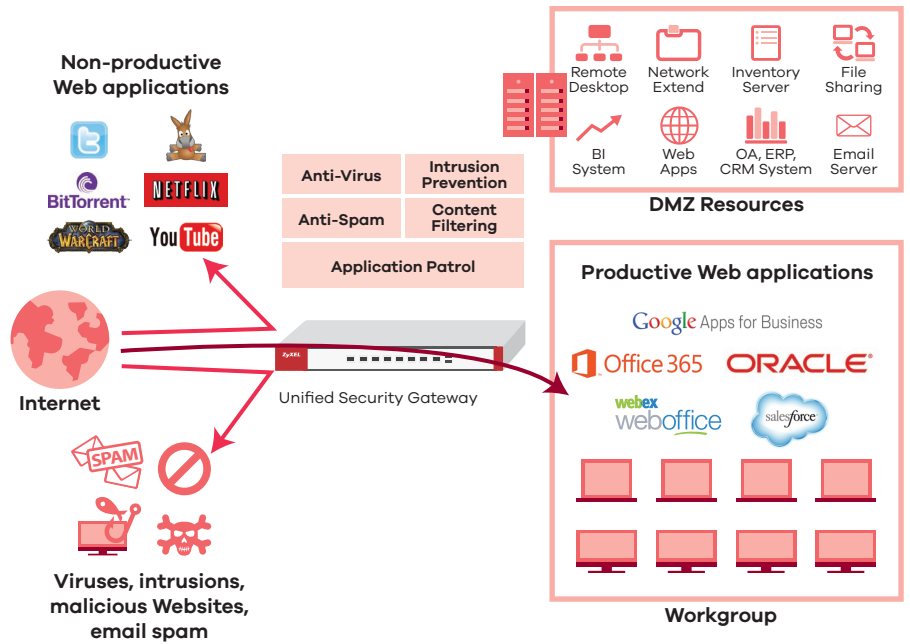

## VPN application

- Branch offices, partners and home users can deploy ZyWALL USG Series for site-to-site IPsec VPN connections
- Remote users can securely access company resources with their computers or smartphones via SSL, IPsec and L2TP over IPsec VPN
- The headquarter ZyWALL USG Series can also establish an IPsec VPN connection with Amazon VPC/Microsoft Azure for secured access to a variety of cloud-based applications

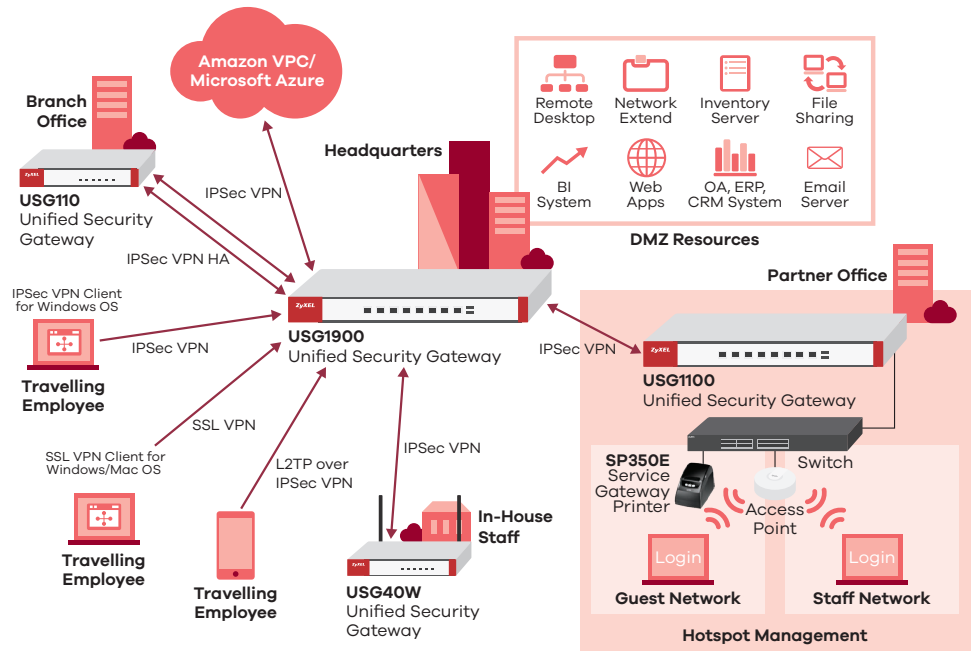




## Hotspot management

- High speed internet access
- Tier of service
- Log record for regulatory compliance
- Premium security control
- Various Network access control (free or paid access, social login)

\*: Hotspot Management supports for USG310 with firmware ZLD4.20 or later; and for USG110/210 with firmware ZLD4.25 or later.



# Specifications

| Model   | USG110  | USG210   | USG310  |
|---|---|--|---|
| Product photo   |  |  |  |
| <b>Hardware Specifications</b>                                  |   |  |   |
| Interfaces  | 4 x LAN/DMZ,<br>2 x WAN, 1 x OPT  | 4 x LAN/DMZ,<br>2 x WAN, 1 x OPT   | 8 x GbE (configurable)  |
| USB ports   | 2   | 2  | 2   |
| Console port  | Yes (DB9)   | Yes (DB9)  | Yes (DB9)   |
| Rack-mountable  | Yes   | Yes  | Yes   |
| Fanless   | -   | -  | -   |
| <b>System Capacity &amp; Performance*1</b>                      |   |  |   |
| SPI firewall throughput (Mbps)*2                                | 1,600   | 1,900  | 5,000   |
| VPN throughput (Mbps)*3   | 400   | 500  | 650   |
| VPN IMIX Throughput (Mbps)*3                                    | 144   | 180  | 280   |
| IDP throughput (Mbps)*4   | 590   | 660  | 900   |
| AV throughput (Mbps)*4  | 450   | 500  | 890   |
| UTM throughput (AV and IDP, Mbps)*4                             | 450   | 500  | 550   |
| Max. TCP concurrent sessions*5                                  | 150,000   | 200,000  | 500,000   |
| Max. concurrent IPsec VPN tunnels*6                             | 100   | 200  | 300   |
| Concurrent SSL VPN users (default/max.)*7                       | 50/150  | 50/150   | 50/150  |
| VLAN interface  | 16  | 32   | 64  |
| Concurrent devices logins (default/max.)*7*8                    | 200/300   | 200/300  | 500/800   |
| <b>Speedtest Performance</b>                                    |   |  |   |
| SPI firewall throughput (Mbps)*9                                | 900   | 900  | 900   |
| <b>WLAN Management</b>  |   |  |   |
| Managed AP number (default/max.)*7                              | 8/40  | 8/40   | 8/72  |
| Recommend max. AP in 1 AP Group                                 | 20  | 20   | 20  |
| <b>Security Service</b>   |   |  |   |
| Anti-Virus (AV)*7   | Yes   | Yes  | Yes   |
| Intrusion Detection and Prevention (IDP) & Application Patrol*7 | Yes   | Yes  | Yes   |
| Anti-Spam*7   | Yes   | Yes  | Yes   |
| Content Filtering (CF)*7*10                                     | Yes   | Yes  | Yes   |
| SecuReporter Premium*7  | Yes   | Yes  | Yes   |
| <b>Key Features</b>   |   |  |   |
| VPN   | IKEv2, IPsec, SSL, L2TP/IPsec   | IKEv2, IPsec, SSL, L2TP/IPsec  | IKEv2, IPsec, SSL, L2TP/IPsec   |
| SSL (HTTPS) inspection  | Yes   | Yes  | Yes   |
| 2-Factor Authentication   | Yes   | Yes  | Yes   |
| EZ Mode   | Yes   | -  | Yes   |
| Hotspot Management*7  | Yes   | Yes  | Yes   |
| Ticket printer support*11/<br>Support Q'ty (max.)               | Yes (SP350E)/10   | Yes (SP350E)/10  | Yes (SP350E)/10   |
| Microsoft Azure   | Yes   | Yes  | Yes   |
| Amazon VPC  | Yes   | Yes  | Yes   |
| Device HA Pro   | Yes   | Yes  | Yes   |
| Link Aggregation (LAG)  | -   | -  | Yes   |

| Model                                |                                   | USG110   | USG210   | USG310  |
|--------------------------------------|-----------------------------------|--|--|---|
| <b>Power Requirements</b>            |                                   |  |  |   |
| <b>Power input</b>                   |                                   | 12 V DC, 3.33 A max.   | 12 V DC, 3.33 A max.   | 100 - 240 V AC, 50/60 Hz, 1.3 A max.  |
| <b>Max. power consumption (watt)</b> |                                   | 37.0   | 37.0   | 58.5  |
| <b>Heat dissipation (BTU/hr)</b>     |                                   | 126.25   | 126.25   | 199.61  |
| <b>Physical Specifications</b>       |                                   |  |  |   |
| <b>Item</b>                          | <b>Dimensions (WxDxH)(mm/in.)</b> | 300 x 188 x 44/<br>11.81 x 7.4 x 1.73  | 300 x 188 x 44/<br>11.81 x 7.4 x 1.73  | 430 x 250 x 44/<br>16.93 x 9.84 x 1.73  |
|                                      | <b>Weight (Kg/lb.)</b>            | 2/4.4  | 2/4.4  | 3.3/7.28  |
| <b>Packing</b>                       | <b>Dimensions (WxDxH)(mm/in.)</b> | 351 x 149 x 243/<br>13.82 x 5.98 x 9.65  | 351 x 152 x 245/<br>13.82 x 5.98 x 9.65  | 519 x 392 x 163/<br>20.43 x 15.43 x 6.42  |
|                                      | <b>Weight (kg/lb.)</b>            | 3.264/7.20   | 3.264/7.20   | 4.8/10.58   |
| <b>Included accessories</b>          |                                   | <ul style="list-style-type: none"> <li>• Power adapter</li> <li>• Power cord</li> <li>• Rack mounting kit</li> </ul> | <ul style="list-style-type: none"> <li>• Power adapter</li> <li>• Power cord</li> <li>• Rack mounting kit</li> </ul> | <ul style="list-style-type: none"> <li>• Power cord</li> <li>• Rack mounting kit</li> </ul> |
| <b>Environmental Specifications</b>  |                                   |  |  |   |
| <b>Operating</b>                     | <b>Temperature</b>                | 0°C to 40°C/<br>32°F to 104°F  | 0°C to 40°C/<br>32°F to 104°F  | 0°C to 40°C/<br>32°F to 104°F   |
|                                      | <b>Humidity</b>                   | 10% to 90%<br>(non-condensing)   | 10% to 90%<br>(non-condensing)   | 10% to 90%<br>(non-condensing)  |
| <b>Storage</b>                       | <b>Temperature</b>                | -30°C to 70°C/<br>-22°F to 158°F   | -30°C to 70°C/<br>-22°F to 158°F   | -30°C to 70°C/<br>-22°F to 158°F  |
|                                      | <b>Humidity</b>                   | 10% to 90%<br>(non-condensing)   | 10% to 90%<br>(non-condensing)   | 10% to 90%<br>(non-condensing)  |
| <b>MTBF (hr)</b>                     |                                   | 787,109.3  | 787,109.3  | 560,811.5   |
| <b>Certifications</b>                |                                   |  |  |   |
| <b>EMC</b>                           |                                   | FCC Part 15 (Class A), CE EMC (Class A), C-Tick (Class A), BSMI  | FCC Part 15 (Class A), CE EMC (Class A), C-Tick (Class A), BSMI  | FCC Part 15 (Class A), CE EMC (Class A), C-Tick (Class A), BSMI                             |
| <b>Safety</b>                        |                                   | LVD (EN60950-1), BSMI  | LVD (EN60950-1), BSMI  | LVD (EN60950-1), BSMI   |

\*: This matrix with firmware ZLD4.60 or later.

\*1: Actual performance may vary depending on network conditions and activated applications

\*2: Maximum throughput based on RFC 2544 (1,518-byte UDP packets).

\*3: VPN throughput measurement are based on RFC 2544 (1,424-byte UDP packets); IMIX: UDP throughput based on a combination of 64 byte, 512 byte, and 1424 byte packet sizes.

\*4: AV (with Express Mode) and IDP throughput measured using the industry standard HTTP performance test (1,460-byte HTTP packets). Testing done with multiple flows.

\*5: Maximum sessions measured using the industry standard IXIA IxLoad testing tool.

\*6: Including Gateway-to-Gateway and Client-to-Gateway.

\*7: With Zyxel service license to enable or extend the feature capacity.

\*8: This is the recommend maximum number of concurrent logged-in devices.

\*9: The Speedtest result is conducted with 1 Gbps WAN link in real world and it is subject to fluctuate due to quality of the ISP link.

\*10: SafeSearch function in CF need to enable SSL inspection firstly and not for small business models.

\*11: With Hotspot Management license support

# Software Features

## Security Service

### Firewall

- ICSA-certified corporate firewall
- Routing and transparent (bridge) modes
- Stateful packet inspection
- User-aware policy enforcement
- SIP/H.323 NAT traversal
- ALG support for customized ports
- Protocol anomaly detection and protection
- Traffic anomaly detection and protection
- Flooding detection and protection
- DoS/DDoS protection

### Intrusion Detection and Prevention (IDP)

- Routing and transparent (bridge) mode
- Signature-based and behavior based scanning
- Customized signatures supported
- Automatic signature updates

### Application Patrol

- Granular control over the most important applications
- Identifies and controls application behavior
- Supports user authentication
- Real-time statistics

### Anti-Virus

- Stream-based scan engine (Stream Mode/Express Mode)
- HTTP, FTP, SMTP, and POP3 protocol supported
- No file size limitation
- Automatic signature updates

### Anti-Spam

- Transparent mail interception via SMTP and POP3 protocols
- Spam and Phishing mail detection
- Blacklist and whitelist support
- Supports DNSBL checking

### Content Filtering

- HTTPs domain filtering
- SafeSearch support
- Whitelist websites enforcement
- URL blacklist and whitelist with keyword blocking
- Customizable warning messages and redirect URL
- Customizable Content Filtering block page

- URL categories increased to 111
- CTIRU (Counter-Terrorism Internet Referral Unit) support

## VPN

### IPSec VPN

- Encryption: DES, 3DES, AES (256-bit)
- Authentication: MD5, SHA1, SHA2 (512-bit)
- Support Route-based VPN Tunnel Interface (VTI)
- Key management: IKEv1 (x-auth, mode-config), IKEv2 (EAP, configuration payload)
- Perfect forward secrecy (DH groups) support 1, 2, 5, 14, 15-18, 20-21
- IPSec NAT traversal (NAT-T)
- Dead Peer Detection (DPD) and relay detection
- PSK and PKI (X.509) certificate support
- VPN concentrator
- Route-based VPN Tunnel Interface (VTI)
- VPN auto-reconnection
- VPN high availability (Failover, LB)
- L2TP over IPSec
- GRE and GRE over IPSec
- NAT over IPSec
- Zyxel VPN client provisioning
- Support iOS L2TP/IKE/IKEv2 VPN Client provision

### SSL VPN

- Supports Windows and Mac OS X
- Supports full tunnel mode
- Supports 2-Factor authentication

## Networking

### WLAN Management

#### (ZyWALL Series support only)

- Supports AP Controller (APC) version 3.60
- Wireless L2 isolation
- Supports auto AP FW update
- Scheduled WiFi service
- Dynamic Channel Selection (DCS)
- Client steering for 5 GHz priority and sticky client prevention
- Auto healing provides a stable and reliable coverage
- Customizable captive portal page
- RADIUS authentication
- WiFi Multimedia (WMM) wireless QoS
- CAPWAP discovery protocol
- Multiple SSID with VLAN

- Supports ZyMesh
- Support AP forward compatibility
- Rogue AP Detection

### Mobile Broadband

- WAN connection failover via 3G and 4G\* USB modems
- Auto fallback when primary WAN recovers

### IPv6 Support

- Dual stack
- IPv4 tunneling (6rd and 6to4 transition tunnel)
- IPv6 addressing
- DNS, DHCPv6 server/client
- Bridge
- VLAN
- PPPoE
- Static/Policy route
- Session control
- Firewall and ADP
- IPSec (IKEv2 6in6, 4in6, 6in4)
- Intrusion Detection and Prevention (IDP)
- Application Patrol
- Content Filtering
- Anti-Virus, Anti-Malware
- Anti-Spam

### Connection

- Routing mode, bridge mode and hybrid mode
- Ethernet and PPPoE
- NAT and PAT
- NAT Virtual Server Load Balancing
- VLAN tagging (802.1Q)
- Virtual interface (alias interface)
- Policy-based routing (user-aware)
- Policy-based NAT (SNAT)
- Dynamic routing (RIPv1/v2 and OSPF, BGP)
- DHCP client/server/relay
- Dynamic DNS support
- WAN trunk for more than 2 ports
- Per host session limit
- Guaranteed bandwidth
- Maximum bandwidth
- Priority-bandwidth utilization
- Bandwidth limit per user
- Bandwidth limit per IP
- GRE
- BGP



## Management

### Authentication

- Local user database
- Built-in user database
- External user database: Microsoft Windows Active Directory, RADIUS, LDAP
- IEEE 802.1x authentication
- Captive portal Web authentication
- XAUTH, IKEv2 with EAP VPN authentication
- Web-based authentication
- Forced user authentication (transparent authentication)
- IP-MAC address binding
- SSO (Single Sign-On) support
- Supports 2-factor authentication with Google Authenticator as the second factor for administrator account

### System Management

- Role-based administration
- Multiple administrator logins
- Supports Cloud Helper
- Multi-lingual Web GUI (HTTPS and HTTP)
- Command line interface (console, Web console, SSH and telnet)
- SNMP v1, v2c, v3
- System configuration rollback

- Configuration auto backup
- Firmware upgrade via FTP, FTP-TLS and Web GUI
- Dual firmware images
- Cloud CNM SecuManager

### Logging/Monitoring

- Comprehensive local logging
- Syslog (send to up to 4 servers)
- Email alerts (send to up to 2 servers)
- Real-time traffic monitoring
- System status monitoring
- Built-in daily report
- Cloud CNM SecuReporter

### Zyxel One Network

- ZON Utility
  - IP configuration
  - Web GUI access
  - Firmware upgrade
  - Password configuration
- Smart Connect
  - Location and System Name update
  - Discover neighboring devices
  - One-click remote management access to the neighboring Zyxel devices

### Hotspot Management

- ZyWALL 110, ZyWALL 310, and ZyWALL 1100 support only

- Integrated account generator, Web-based authentication portal and billing system
- Supports external RADIUS servers
- Per account bandwidth management
- User agreement login
- SP350E Service Gateway Printer enables one-click account and billing generation
- Built-in billing system
  - Time-to-finish accounting mode
  - Accumulation accounting mode
- Supports PayPal online payment
- Marketing tool
  - Advertisement link
  - Walled garden
  - Portal page
- Billing Replenish

### Subscription Services

- Anti-Virus
- Application Patrol & IDP
- Content Filtering
- Anti-Spam
- Hotspot Management
- Managed AP
- SecuReporter Premium

\*: For specific models supporting the 3G and 4G dongles on the list, please refer to the Zyxel product page at 3G dongle document

## Licenses

### Security

| Product | Anti-Virus     | Application Patrol & IDP | Content Filtering | Anti-Spam      | SecuReporter Premium |
|---------|----------------|--------------------------|-------------------|----------------|----------------------|
| USG110  | 1 year/2 years | 1 year/2 years           | 1 year/2 years    | 1 year/2 years | 1 year/2 years       |
| USG210  | 1 year/2 years | 1 year/2 years           | 1 year/2 years    | 1 year/2 years | 1 year/2 years       |
| USG310  | 1 year/2 years | 1 year/2 years           | 1 year/2 years    | 1 year/2 years | 1 year/2 years       |

1. Zyxel USGs can be purchased with bundled 12-month standard license (Anti-Virus, Anti-Spam, Content Filtering, IDP and SecuReporter) with extra 1-month trial.

2. Licenses can be easily activated, renewed and managed at myZyxel

3. License bundles may vary according to region. Please contact your local sales representative for more information.

### Connectivity & Industrial Solution

| Product | SSL VPN Tunnels     | SSL VPN Client*      | IPSec VPN Client        |
|---------|---------------------|----------------------|-------------------------|
| USG110  | Add 5/10/50 tunnels | For 1/5/10 client(s) | For 1/5/10/50 client(s) |
| USG210  | Add 5/10/50 tunnels | For 1/5/10 client(s) | For 1/5/10/50 client(s) |
| USG310  | Add 5/10/50 tunnels | For 1/5/10 client(s) | For 1/5/10/50 client(s) |

\*: Support OS: MAC OS 10.7 or later

| Product | Concurrent Device Upgrade* | Hotspot Management*1 | Managed APs   |
|---------|----------------------------|----------------------|---------------|
| USG110  | 100 nodes                  | 1 year/One-time      | Add 2/4/8 APs |
| USG210  | 100 nodes                  | 1 year/One-time      | Add 2/4/8 APs |
| USG310  | 100/300 nodes              | 1 year/One-time      | Add 2/4/8 APs |

\*: With firmware ZLD 4.20 or later

\*1: Hotspot Management supports for USG310 in firmware ZLD4.20 or later, and for USG110/210 in firmware ZLD4.25 or later.

## Access Point Compatibility List

| Product                   | Unified AP  | Unified Pro AP   |
|---------------------------|---|--|
| <b>Models</b>             | <ul style="list-style-type: none"> <li>NWA5301-NJ</li> <li>NWA5121-NI</li> <li>NWA5123-AC HD</li> <li>NWA5123-AC</li> <li>NWA5123-NI</li> <li>WAC5302D-S</li> </ul> | <ul style="list-style-type: none"> <li>WAC510D</li> <li>WAC5302D-Sv2*</li> <li>WAC500*</li> <li>WAC500H*</li> <li>WAC6103D-I</li> <li>WAC6503D-S</li> <li>WAC6502D-S</li> <li>WAC6303D-S</li> <li>WAC6553D-E</li> <li>WAC6552D-S</li> <li>WAC6502D-E</li> <li>WAX650S</li> <li>WAX610D*</li> </ul> |
| <b>Functions</b>          |   |  |
| <b>Central management</b> | Yes   | Yes  |
| <b>Auto provisioning</b>  | Yes   | Yes  |
| <b>Data forwarding</b>    | Local bridge  | Local bridge/Data tunnel   |
| <b>ZyMesh</b>             | Yes   | Yes  |

\*: From APC3.0, commercial gateways supporting APC technology are able to recognize APs with FW release higher than APC3.0 as Forward Compatible APs. Resellers can introduce newly-available Zyxel APs with basic features supported without upgrading any new controller firmware.

## Accessories

### SecuExtender Software

| Item                     | Description  | Supported OS   |
|--------------------------|--|--|
| <b>IPSec VPN Client*</b> | IPSec VPN client software for the ZyWALL and USG Series with Easy VPN for zero configuration remote access | <ul style="list-style-type: none"> <li>• Windows Server 2016</li> <li>• Windows Server 2019</li> <li>• Windows 7 (32/64-bit)</li> <li>• Windows 8 (32/64-bit)</li> <li>• Windows 10 (32/64-bit)</li> </ul> |
| <b>SSL VPN Client*</b>   | Secured VPN connection between PC/MAC and ZyWALL Firewall  | <ul style="list-style-type: none"> <li>• Windows 7 (32/64-bit)</li> <li>• Windows 8 (32/64-bit)</li> <li>• Windows 10 (32/64-bit)</li> <li>• MAC OS 10.14</li> </ul>                                       |

\*: A 30-day trial version of IPSec VPN client and SSL VPN client for MAC OS can be downloaded from official Zyxel website. To continue using the application, please contact your regional sales representatives and purchase a commercial license for the application.

### Service Gateway Printer

| Model         | Feature   | Supported Model  |
|---------------|---|--|
| <b>SP350E</b> | <ul style="list-style-type: none"> <li>• Buttons: 3</li> <li>• Paper roll width: 58 (+0/-1) mm</li> <li>• Interface: 10/100 Mbps RJ-45 port</li> <li>• Power input: 12V DC, 5A max.</li> <li>• Item dimensions (WxDxH):<br/>176 x 111 x 114 mm<br/>(6.93" x 4.37" x 4.49")</li> <li>• Item weight: 0.8 kg (1.76 lb.)</li> </ul> | <ul style="list-style-type: none"> <li>• USG FLEX 200</li> <li>• USG FLEX 500</li> <li>• USG FLEX 700</li> <li>• VPN50</li> <li>• VPN100</li> <li>• VPN300</li> <li>• VPN1000</li> <li>• USG60(W)</li> <li>• USG110</li> <li>• USG210</li> <li>• USG310</li> <li>• USG1100</li> <li>• USG1900</li> <li>• USG2200 Series</li> <li>• ZyWALL110</li> <li>• ZyWALL310</li> <li>• ZyWALL1100</li> </ul> |



\*: Hotspot management licenses required

For more product information, visit us on the web at [www.zyxel.com](http://www.zyxel.com)

Copyright © 2020 Zyxel and/or its affiliates. All rights reserved.  
All specifications are subject to change without notice.



27/10/20