




Sync & Charge Cables

USB-C® to USB-C® USB4
USB-C® to USB-C®
USB-C® to Lightning
USB-A to USB-C®

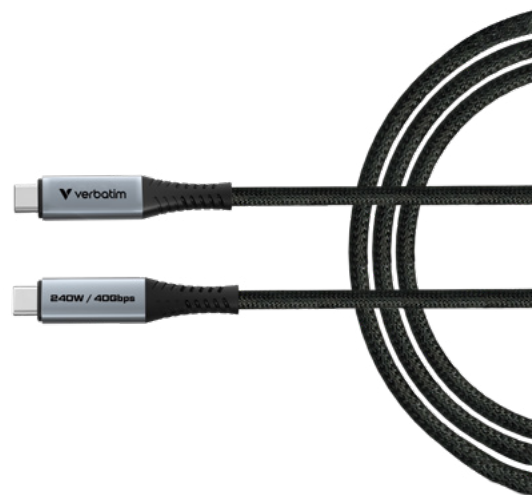

Power and Performance.

Designed for fast charging, reliable data transfer, and exceptional durability, the Verbatim Sync and Charge cables are perfect for smartphones, tablets, laptops, and more.

Whether you need the USB-A to USB-C®, USB-C® to Lightning, or the USB-C® to USB-C® options, Verbatim has you covered. With support for Power Delivery (PD) and Quick Charge protocols, our cables deliver up to 240W of power and data transfer speeds of up to 40Gbps, ensuring you stay connected and productive.

Built to withstand robust daily use, these cables feature a braided nylon exterior, reinforced metal alloy connectors, and an aramid fibre core, providing superior strength and resistance to wear and tear.

For those who want real-time charging insights, our USB-C® cables are also available with an integrated power display, allowing you to monitor the charging wattage instantly.



Supports PD 3.1
charging up to 240W PD



Data Transfer
up to 40 Gbps




Dupont™ Kevlar®
Inside



50,000x
Bend Test Passed



General Information	31843	31844	31845	31846	31847	31848	31849
Product lenght	1200 mm						
Product diameter	3.8 mm	3.8 mm	3.8 mm	3.8 mm	5.1 mm	3.8 mm	5.1 mm
Product weight	28 g	28 g	31 g	34 g	47.1 g	46.5 g	46.5 g
Colour	Black + Grey						
Connector 1	USB-A	USB-C	USB-C	USB-C	USB-C	USB-C	USB-C
Connector 2	USB-C	Lightning	USB-C	USB-C	USB-C	USB-C	USB-C
USB version	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB4	USB 2.0	USB4
Bend test passed	50.000 cycles	50.000 cycles	50.000 cycles	50.000 cycles	30.000 cycles	30.000 cycles	30.000 cycles
Cable material	Aluminum, Nylon, TPE, Graphene, Aramid*						
Video supported	-	-	-	-	4K/8K	-	4K/8K
LED Display	No	No	No	No	No	Yes	Yes
Specifications							
Data transfer rate	480 Mbps	480 Mbps	480 Mbps	480 Mbps	40 Gbps	480 Mbps	40 Gbps
Power delivery	18 W	60 W	60 W	100 W	240 W	100 W	240 W
Charging technology supported	QC 3.0	PD 3.0	PD 3.0, QC 3.0	PD 3.0, QC 3.0	PD 3.1	PD 3.0, QC 3.0	PD 3.1
Directives							
Compliance certificates	CE, RoHS, REACH, UKCA						
Electromagnetic Compatibility	2014/30/EC						
Low Volatge Protection	2014/35/EC						
General product Safety	2001/95/EC						
RoHS Directive	2011/65/EC						
Annex II	2015/863/EC						
Test Standards	EN 55032:2015+A1:2020 EN 55035:2017+A11:2020 EN IEC 61000-3-2:2019+A2:2024 EN 61000-3-3+A2:2021+AC:2022						

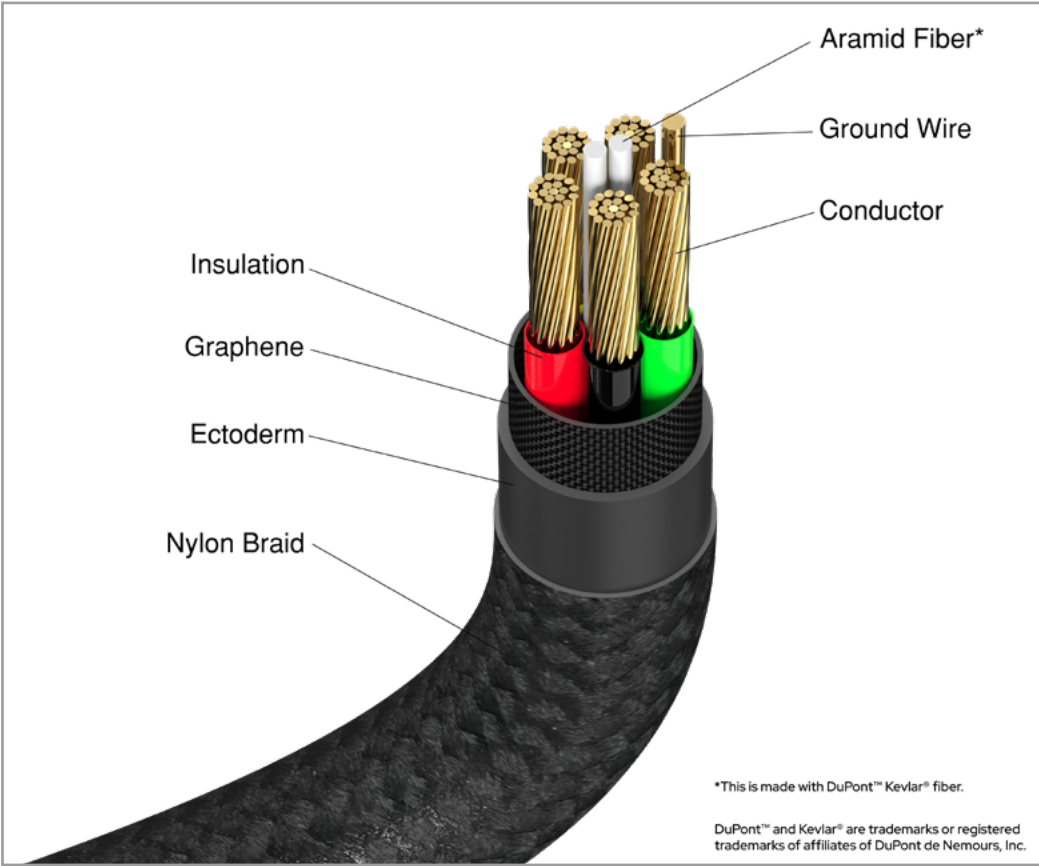

Cross section image for PN 31844, 31845 and 31846.
 Please note, other models have different internal structures.



PN	Description	MOQ	Tariff Code	Bar Code	EAN128 Code	EAN14 Code
31843	Verbatim Sync & Charge USB-A to USB-C 18W 120 cm	10	85444290	023942318439	(02)00023942318439(37)10(91)847 (02)00023942318439(37)40(91)847	20023942318433 50023942318434
31844	Verbatim Sync & Charge Cable USB-C to Lightning 120 cm	10	85444290	023942318446	(02)00023942318446(37)10(91)847 (02)00023942318446(37)40(91)847	20023942318440 50023942318441
31845	Verbatim Sync & Charge USB C to USB C 60W 120 cm	10	85444290	023942318453	(02)00023942318453(37)10(91)847 (02)00023942318453(37)40(91)847	20023942318457 50023942318458
31846	Verbatim Sync & Charge USB C to USB C 100W 120 cm	10	85444290	023942318460	(02)00023942318460(37)10(91)847 (02)00023942318460(37)40(91)847	20023942318464 50023942318465
31847	Verbatim Sync & Charge Cable USB-C to USB-C 240W 40 Gbps 120 cm	10	85444290	023942318477	(02)00023942318477(37)10(91)847 (02)00023942318477(37)40(91)847	20023942318471 50023942318472
31848	Verbatim Sync & Charge USB C to USB C 100W Display 120 cm	10	85444290	023942318484	(02)00023942318484(37)10(91)847 (02)00023942318484(37)40(91)847	20023942318488 50023942318489
31849	Verbatim Sync & Charge Cable USB-C to USB-C 240W 40 Gbps Display 120 cm	10	85444290	023942318491	(02)00023942318491(37)10(91)847 (02)00023942318491(37)40(91)847	20023942318495 50023942318496

Logistic Information	31843	31844	31845	31846	31847	31848	31849
Product Dimensions L	1200 mm	1200 mm	1200 mm	1200 mm	1200 mm	1200 mm	1200 mm
Product Weight	28 g	28 g	31 g	34 g	47.1 g	46.5 g	46.5 g
Units per Pack	1	1	1	1	1	1	1
Pack Dimensions L x W x H	141 x 85.5 x 21.6 mm	141 x 85.5 x 21.6 mm	141 x 85.5 x 21.6 mm	141 x 85.5 x 21.6 mm	141 x 85.5 x 21.6 mm	141 x 101.5 x 28 mm	141 x 101.5 x 28 mm
Pack Weight	54.8 g	54.8 g	57.8 g	60.8 g	73.9 g	78.3 g	78.3 g
Units per Inner Carton	10	10	10	10	10	10	10
Inner Carton Dimensions L x W x H	223 x 165 x 114 mm	223 x 165 x 114 mm	223 x 165 x 114 mm	223 x 165 x 114 mm	223 x 180 x 114 mm	223 x 180 x 114 mm	223 x 180 x 114 mm
Inner Carton Weight	568 g	568 g	598 g	628 g	759 g	803 g	803 g
Units per Outer Carton	40	40	40	40	40	40	40
Outer Carton Dimensions L x W x H	355 x 243 x 258 mm	355 x 243 x 258 mm	355 x 243 x 258 mm	355 x 243 x 258 mm	385 x 243 x 258 mm	385 x 243 x 258 mm	385 x 243 x 258 mm
Outer Cartons Weight	2632 g	2632 g	2752 g	2872 g	3396 g	3572 g	3572 g
Outer Cartons per Layer	9	9	9	9	9	9	9
Layers per Pallet	4	4	4	4	4	4	4
Units per Pallet	1440	1440	1440	1440	1440	1440	1440



32148, 32149 - LED Display charging wattage



Pack Contents

- Verbatim Sync & Charge Cable
- Quick Start Guide




Warranty

2 year limited warranty

For more information, please
contact your key account manager



Publication date: 20/01/2025
© 2025 Verbatim. All rights reserved.
All brand names are registered trademarks of their respective owners.
Unauthorized use strictly prohibited.
Specifications are subject to change without prior notice.

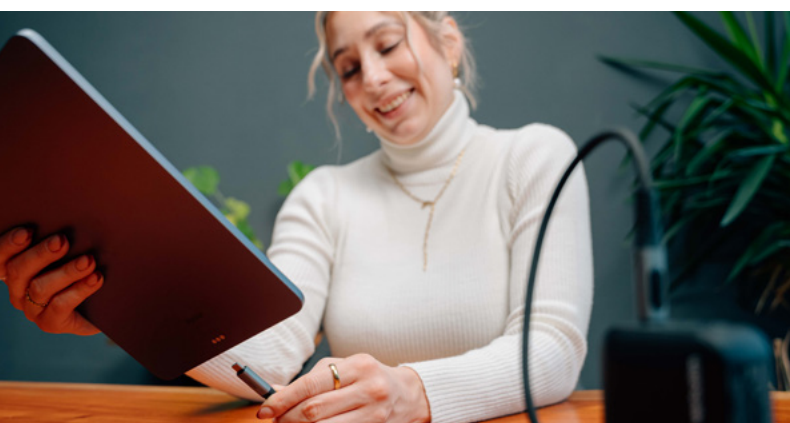

Made for
iPhone | iPad

