

Keen 600 USB

The power to control

PN: UPLI-LI060KU-CG01B
EAN: 6422956009540

Specifications

Capacity	600 VA / 360 W
Type	Line-Interactive
Input	
Nominal Voltage	230 VAC
Accepted Voltage Range	162 ~ 290 VAC $\pm$ 1%
Frequency Range	50Hz / 60Hz (Auto Sensing)
Output	
Nominal Voltage	230 VAC
Accepted Voltage Range	207~253 VAC
Frequency Range (Batt. Mode)	50 Hz / 60Hz $\pm$ 1%
Power Factor	0.6 @ nominal voltage (100% load)
Waveform (Batt. Mode)	Simulated Sinewave
Transfer Time	Typical 4 ms
Overload Protection	Circuit breaker
Line mode overload	>(110 $\pm$ 10)% fault after alarm 1min >(120 $\pm$ 10)% fault immediately
Battery mode overload	>(110 $\pm$ 10)% fault after alarm 1min >(120 $\pm$ 10)% fault immediately
Indicators type	
LED & Alarm	Load Capacity, Load & Battery level, AC mode, Battery mode, Fault indicators
Protection	
Outlets type	2 x Schuko Battery Backup 2 x RJ11/45 (IN/OUT) for modem/ phone/LAN surge protection
Full protection	Overload, Over voltage, Short Circuit, Over discharge and Over charge
Environement	
Protection class	IP20
Noise level	Less than 40dB
Humidity	0-90 % (non-condensing)
Temperature	0-40°C



2 x Schuko outlets with protection



Auto-Restart



Simulated sinewave


- Simulated sinewave
- Auto-Restart while AC is recovering
- Auto-Charge
- Automatic Voltage Regulation (AVR)
- Off-Mode Charging
- Cold start function

Battery

Battery Type & Number	1 x GP07122L (PN: BTVACFUOBTB2LBT01B)
Typical Recharge Time	6 hours up to 90% capacity
Running time on battery (minutes)	25% Load - 19 min 50% Load - 5 min 75% Load - 1 min 100% Load - <1 min
Management	
Communication port	HID USB / LAN
Software	http://www.powermonitor.software/
Physical	
Product dimensions	276 x 87 x 165 mm
Product weight	4 kg
Retail pack dimensions	319 x 126 x 232 mm
Retail pack Weight	4.23 kg



Running time on battery

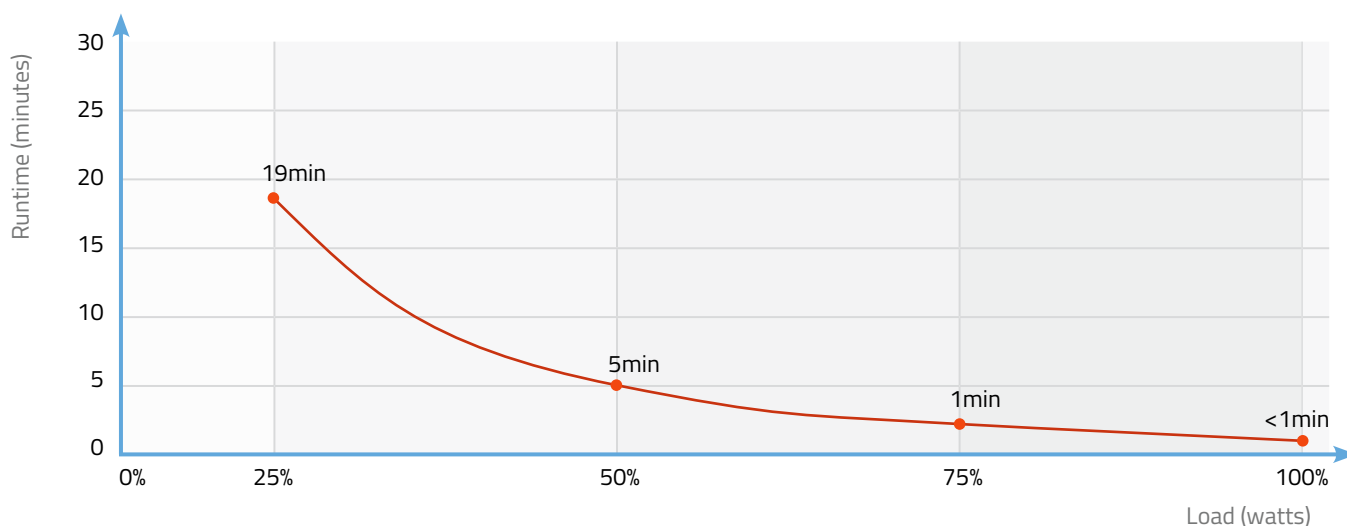

Logistics

Carton Box Size (LxWxH)	531 x 336 x 263 mm
Pieces in the Carton Box	4
Net & Gross weight / CTN	NW: 16.92 kg / GW: 17.52 kg



Certificates

RoHS **CE**
2011/65/EU

