

Code 2000

The secret code for optimal protection

PN: UPLI-LI200CO-AZ01B
EAN: 6422956009366

Specifications

Capacity	2000 VA / 1200 W
Type	Line-interactive
Input	
Nominal Voltage	230 VAC
Accepted Voltage Range	162-290 VAC
Frequency Range	60 Hz / 50 Hz (auto sensing)
Phase	Single phase with ground
Output	
Nominal Voltage	230 VAC
Accepted deviation range	± 10 %
Frequency Range (Batt. Mode)	50 Hz or 60Hz ± 1 Hz
Waveform (Batt. Mode)	Simulated sine-wave
Transfer Time	
AC Mode to Batt. Mode	Typical 4 ms / Max 10 ms
Efficiency	
AC Mode	≥ 95 % at full charged battery
To Battery Mode	≥ 60 % at full charged battery
Indicators type	
LCD Display	UPS status, Load level, Battery level, Input/Output voltage
Alarm	Battery mode, Low battery, Overload, Fault
Protection	
Full protection	Overload, Discharge & Overcharge protection



Software management



LCD display



Rack design

- Auto-Restart while AC is recovering
- Excellent microprocessor control guarantees high reliability
- Boost and buck AVR for voltage stabilization
- Off-mode charging
- Simulated sine-wave
- Cold start function
- User-friendly LCD
- Software management

Outlets type

Input	1 x IEC-320 C14
Output	8 x IEC C13

Environnement


Protection class	IP20
Humidity	0-90 % RH @ 0-40°C (non-condensing)
Noise level	Less than 45dB

Battery

Battery Type & Number	2 x GP09122L (PN: BTVACGUEBTC2LBTO1B)
Charging Current (Max.)	1A
Typical Recharge Time	4-6 hours recover to 90% capacity for internal battery at 1A charging current
Running time on battery (minutes)	25% Load - 17 min 50% Load - 3.7 min 75% Load - 1.5 min 100% Load - 0.6 min

Management

Connection port	USB port
Software	https://www.power-software-download.com/viewpower.html
Software capability	Monitor & Control over USB

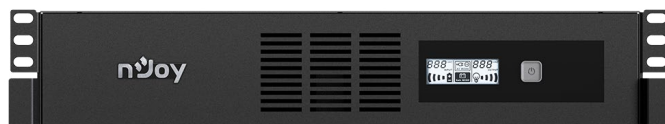


Physical

Product dimensions	438 x 300 x 86 mm
Product weight	14.4 kg



Running time on battery

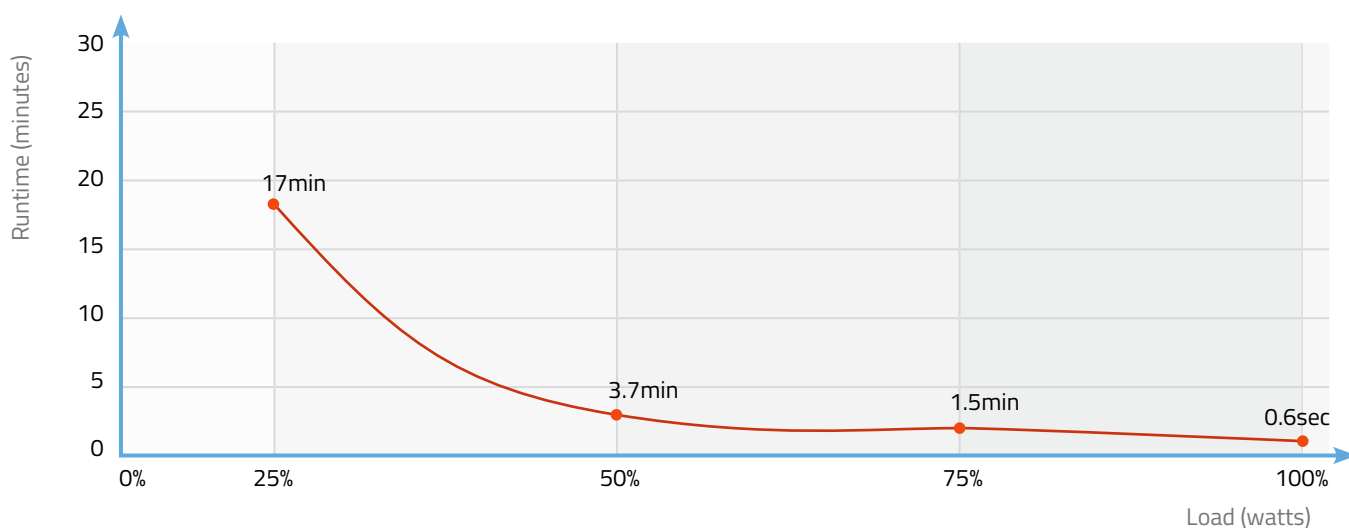

Logistics

Carton Box Size (LxWxH)	394 x 498 x 201 mm
Pieces in the Carton Box	1
Net & Gross weight / CTN	N.W.: 14.4 kg / G.W.: 16.2 kg



Certificates

