

# Token 600

The seal of effective defence

PN: UPCSBL5660TTOAZ01B  
EAN: 6422956011499

## Specifications

|                              |                                                                                |
|------------------------------|--------------------------------------------------------------------------------|
| <b>Capacity</b>              | 600 VA / 360 W                                                                 |
| <b>Type</b>                  | Line-Interactive                                                               |
| <b>Input</b>                 |                                                                                |
| Nominal Voltage              | 230 VAC                                                                        |
| Accepted Voltage Range       | 170 – 280 VAC                                                                  |
| Frequency Range              | 50Hz / 60Hz (Auto Sensing)                                                     |
| <b>Output</b>                |                                                                                |
| Nominal Voltage              | 230 VAC                                                                        |
| Accepted Voltage range       | 230 VAC, +/- 10%                                                               |
| Frequency Range (Batt. Mode) | 50 Hz / 60Hz ± 1%                                                              |
| Power Factor                 | 0.6 @ nominal voltage (100% load)                                              |
| Waveform (Batt. Mode)        | Simulated Sinewave                                                             |
| Transfer Time                | 6ms typical                                                                    |
| <b>Indicators type</b>       |                                                                                |
| LED                          | AC Mode:Green lighting;<br>Battery Mode:Yellow flashing;<br>Fault:Red lighting |
| Alarm                        | Battery mode, Overload mode,<br>Low battery, Fault mode                        |
| <b>Protection</b>            |                                                                                |
| Outlets type                 | 4x Schuko Battery Backup<br>4x Schuko Surge Protection                         |
| Full protection              | Overload, discharge, and<br>overcharge protection                              |
| Surge rating energy          | 475 Joules                                                                     |
| <b>Environement</b>          |                                                                                |
| Protection class             | IP20                                                                           |
| Noise level                  | Fanless                                                                        |
| Humidity                     | 0-90 % (non-condensing)                                                        |
| Temperature                  | 0-40°C                                                                         |



HID USB



8 x Schuko



Auto-restart

- Compact size for stand and mounting flexibility
- Excellent microprocessor control guarantees high reliability
- Easy replacement battery compartment
- Provides battery backup and surge protected outputs
- Auto restart while AC is recovering
- Simulated sine wave
- Off-mode charging
- Cold start function
- Software management
- Boost and buck AVR for voltage stabilization

## Battery

|                                   |                                                                |
|-----------------------------------|----------------------------------------------------------------|
| Battery Type & Number             | 1x GP07122F                                                    |
| Typical Recharge Time             | 6~8 hours recover to 90% capacity                              |
| Running time on battery (minutes) | 25% Load - 15min<br>50% Load - 5min 30s<br>75% Load - 0min 40s |

## Management


|                    |                                                                                                                             |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Communication port | HID USB                                                                                                                     |
| Software           | <a href="https://www.power-software-download.com/viewpower.html">https://www.power-software-download.com/viewpower.html</a> |

## Physical

|                        |                    |
|------------------------|--------------------|
| Product dimensions     | 345 x 200 x 100 mm |
| Product weight         | 5.05 kg            |
| Retail pack dimensions | 425 x 269 x 146 mm |
| Retail pack Weight     | 5.45 kg            |



## Running time on battery

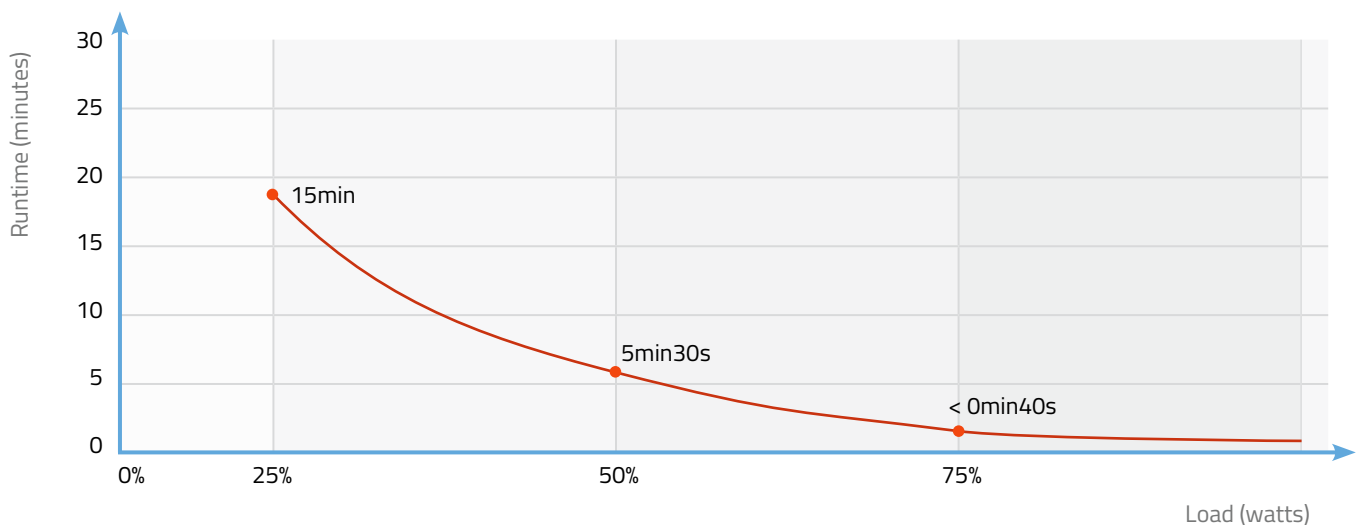

## Logistics

|                          |                             |
|--------------------------|-----------------------------|
| Carton Box Size (LxWxH)  | 461 x 438 x 287 mm          |
| Pieces in the Carton Box | 3                           |
| Net & Gross weight / CTN | NW: 15.15 kg / GW: 16.35 kg |



## Certificates

**RoHS** **CE**  
2011/65/EU

