

Token 800

The seal of effective defence

PN: UPCSBLS680TTOAZ01B
EAN: 6422956011512

Specifications

Capacity	800 VA / 480 W
Type	Line-Interactive
Input	
Nominal Voltage	230 VAC
Accepted Voltage Range	170 – 280 VAC
Frequency Range	50Hz / 60Hz (Auto Sensing)
Output	
Nominal Voltage	230 VAC
Accepted Voltage range	230 VAC, +/- 10%
Frequency Range (Batt. Mode)	50 Hz / 60Hz ± 1%
Power Factor	0.6 @ nominal voltage (100% load)
Waveform (Batt. Mode)	Simulated Sinewave
Transfer Time	6ms typical
Indicators type	
LCD	Standby mode, AC mode Overload mode, Battery mode Self-Test mode Battery replacement mode Fault Mode
Alarm	Battery mode, Overload mode, Low battery, Fault mode
Protection	
Outlets type	4x Schuko Battery Backup 4x Schuko Surge Protection RJ45 protection with 1Gb/s
Full protection	Overload, discharge, overcharge and overvoltage protection
Surge rating energy	475 Joules
Efficiency	
AC mode	>95% at full load
AVR mode	>88% at full load
Battery mode	>60% at half load



USB Charger



8 x Schuko




1Gb/s LAN
protection

- LCD Display
- Compact size for stand and mounting flexibility
- Excellent microprocessor control guarantees high reliability
- Easy replacement battery compartment
- Provides battery backup and surge protected outputs
- Auto restart while AC is recovering
- Simulated sine wave
- Off-mode charging
- Cold start function
- Software management
- Boost and buck AVR for voltage stabilization

Environement	
Protection class	IP20
Noise level	Fanless
Humidity	0-90 % (non-condensing)
Temperature	0-40°C
Battery	
Battery Type & Number	1x GP09122L
Typical Recharge Time	6~8 hours recover to 90% capacity
Running time on battery (minutes)	25% Load - 18min 50% Load - 3min 75% Load - <1min
Management	
Communication port	HID USB
Software	https://www.power-software-download.com/viewpower.html
USB Charger	5V/2.1A
Physical	
Product dimensions	345 x 200 x 100 mm
Product weight	5.80 kg
Retail pack dimensions	425 x 269 x 146 mm
Retail pack Weight	6.2 kg



Running time on battery

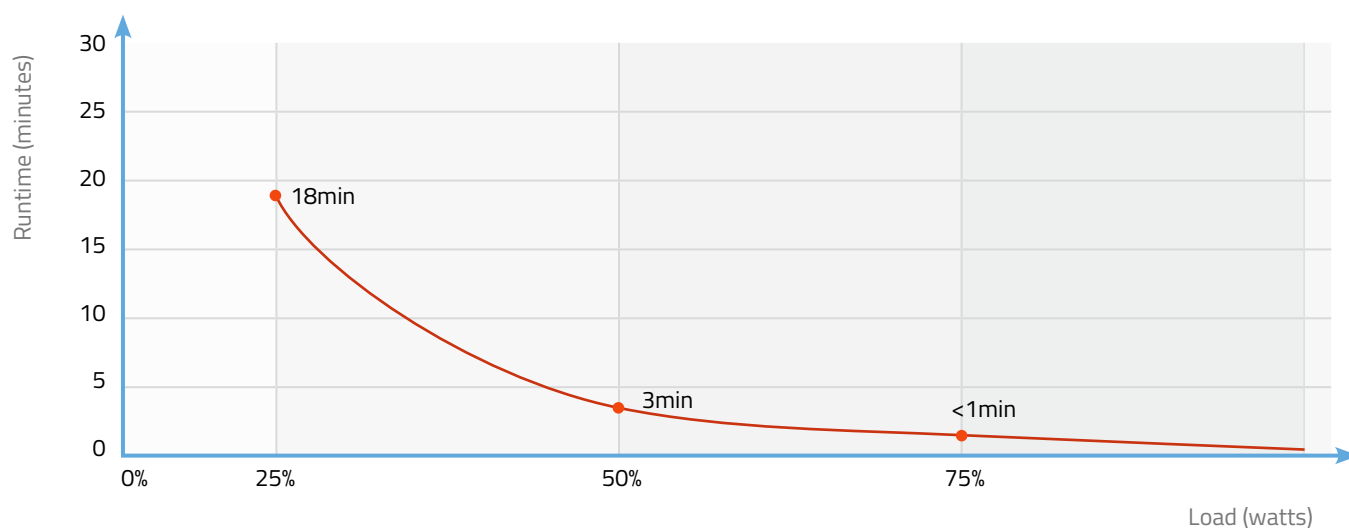

Logistics

Carton Box Size (LxWxH)	461 x 438 x 287 mm
Pieces in the Carton Box	3
Net & Gross weight / CTN	NW: 17.4 kg / GW: 18.6 kg



Certificates

