



Just for starters...

1. Drill four holes into a solid, structural ceiling member, and secure the ceiling mount base to the ceiling.

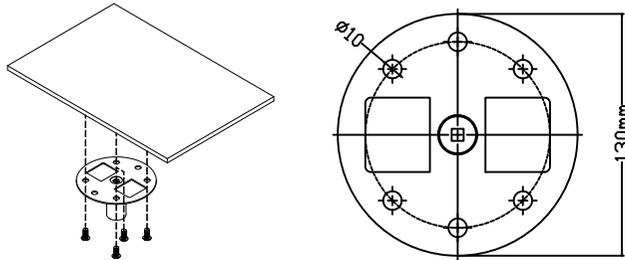


2. Choose the length combination based on actual environment. (CM-01S doesn't include Type 2 and Type 3.)

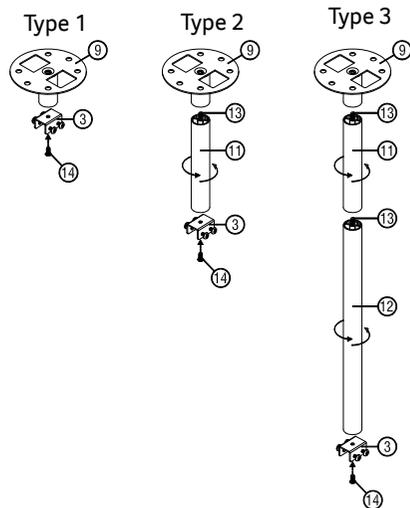


3. Type 1:
For the standard size use three bracket screws to mount the projector to the ceiling mount bracket.

Type 2 and Type 3:
Alternatively, for the larger size, use the sliding extensions for more supports.

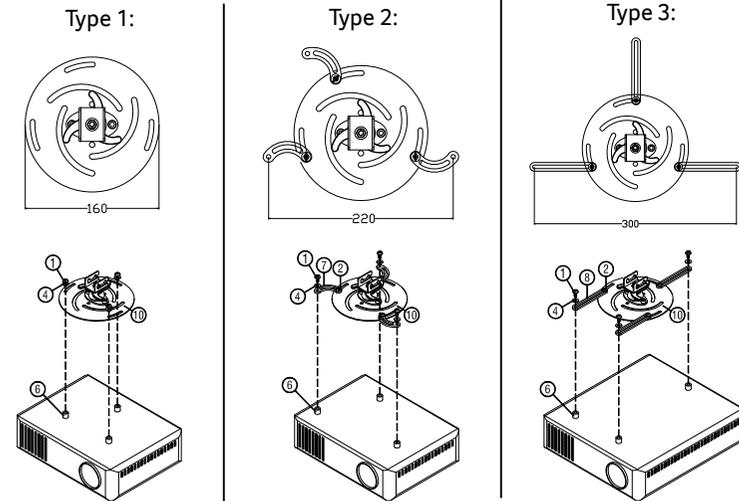


Note: It is recommended that you keep a reasonable space between the bracket and the projector to allow for proper heat distribution.

4. Connect the main body connector to the projector bracket (illustration 1), and then screw up four screws (illustration 2).

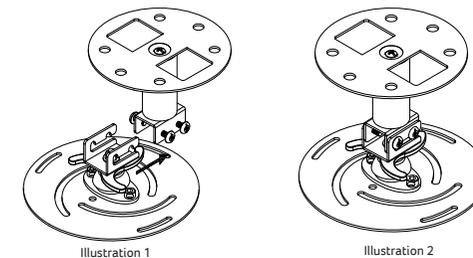


5. Adjust the angle and positioning as necessary.

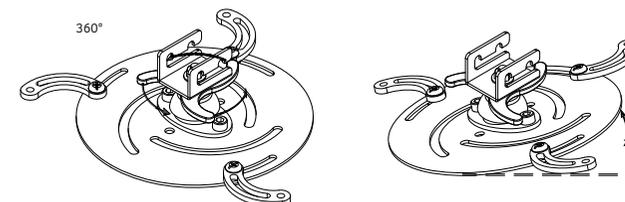

Item / Type #	Image (x Quantity)	Usage
1. Screw Type A	 X12 -25mm length / 3mm & 4mm diameter -20mm length / 3mm & 4mm diameter	Attach projector to ceiling mount bracket-use appropriate size for your equipment
2. Screw Type B	 X3 -12mm length / 5mm width	Attach sliding extension to bracket
3. Main Body Connector	 X1	
4. Larger Washer	 X3	
5. Small Fat Cap	 X3	
6. Heat Buffer Piece	 X3	Allows for proper heat distribution
7. Sliding Extension A	 X3	Adds to support for larger projector size
8. Sliding Extension B	 X3	Adds to support for larger projector size
9. Ceiling Mount Base	 X1	Attach to ceiling
10. Projector Bracket	 X1	Supports projector and allows for adjustments
11. Short Rod	 X1	Basic length unit
12. Long Rod	 X1	Basic length unit
13. Connecting Screw	 X2 -25mm length / 6mm width	To connect the short/long rods and ceiling mount base
14. Screw Type C	 X1 -12mm length / 6mm width	To screw up main body connector to ceiling mount base

Universal Ceiling Mount

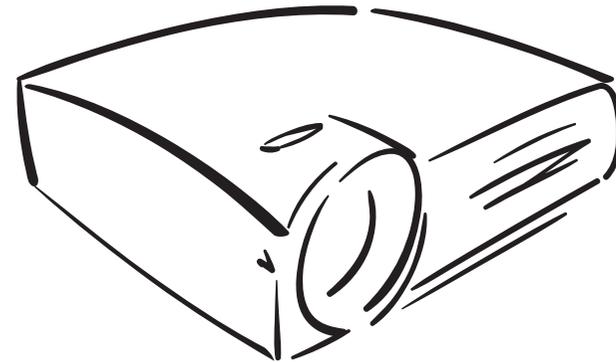

Note: 1. Acer recommends that you consult an electrician or carpenter if you are not comfortable with the installation process.
2. The length of CM-01S from ceiling mount base to projector bracket is 11cm, while the length of CM-02S is adjustable from 11cm to 64cm.
3. This ceiling mounting can sustain a projector up to 20 kg weight.
4. The thread type of all the included screws are in metric.